
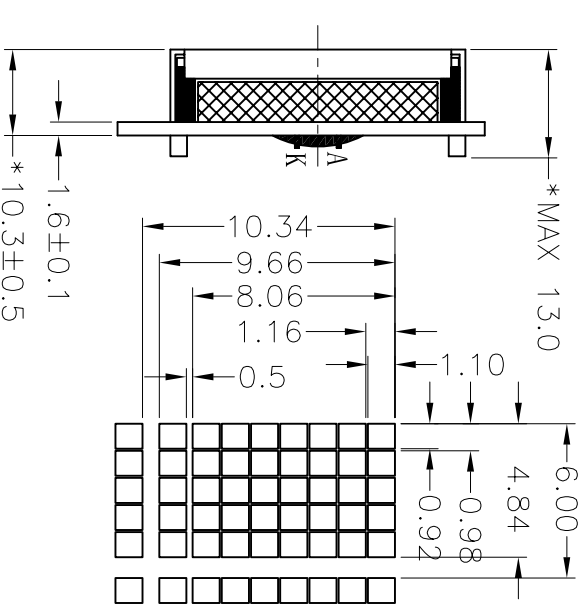


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	AUG-29-2007
B	Change LOGO	NOV-08-2007
C	Update IC	NOV-27-2007

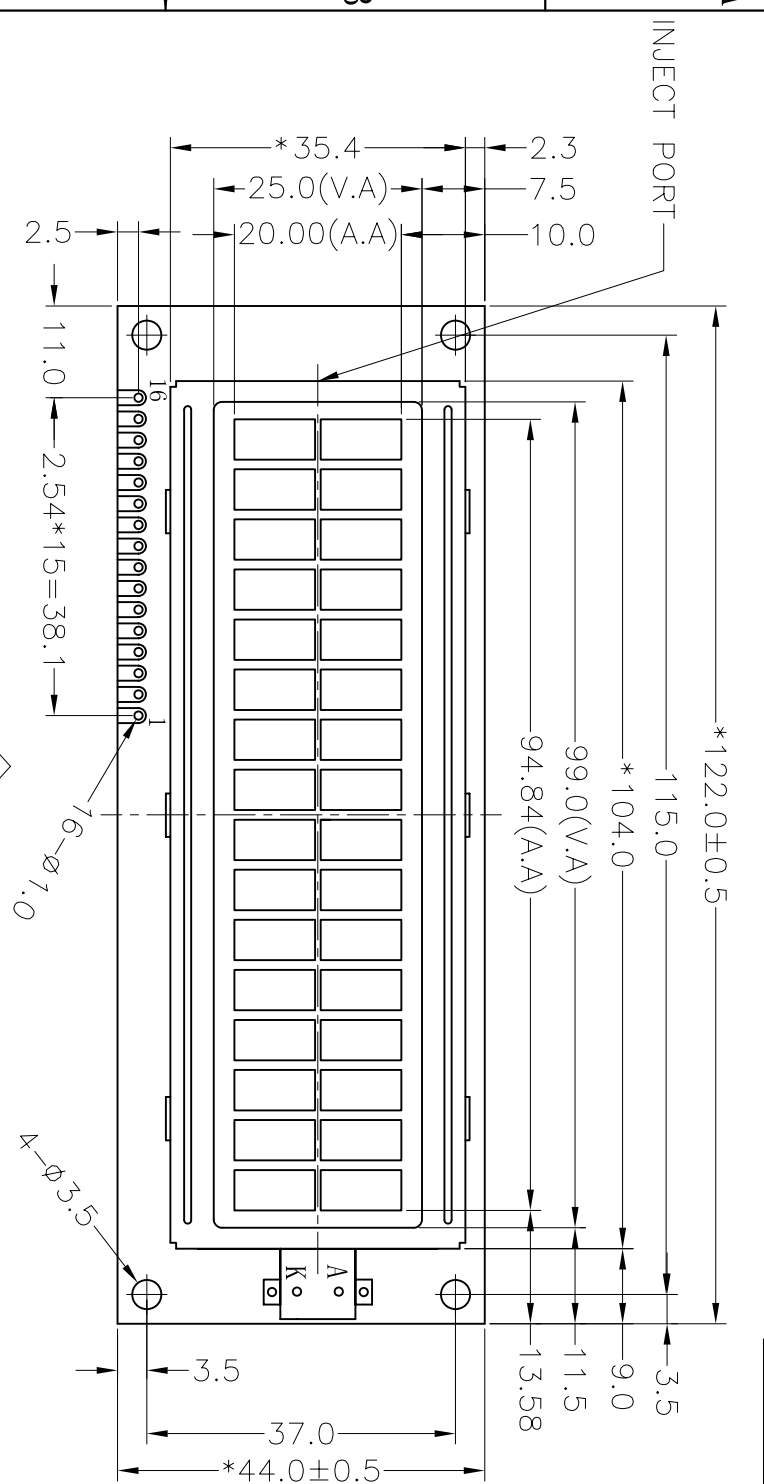

PIN	1	2	3	4	5	6	7	8
CONNECTOR	LEDK	LEDA	VSS	VDD	VO	RS	R/W	E
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.5V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Transmissive/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). IC: SPLC780D-001B-C
- 7). Backlight: Bottom, Yellow-green ,
- 8). Dimensions with mark "\*" are important, with mark "()" are referenced
- 9). All the raw materials are RoHS compliant.

VIEWING DIRECTION

**深圳秋田电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROTECTION 三角法	MODEL NUMBER 模组型号	SCALE: 比例	FTT 适应图面
ABC016002C32-Y1Y-R-01			ABC016002C32-Y1Y-R-01	SHEET: 页次	1 OF 1
DO NOT SCALE THIS DRAWING.	APP: 签字	CHK: 签字	DWN: 日期	GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE 日期	