
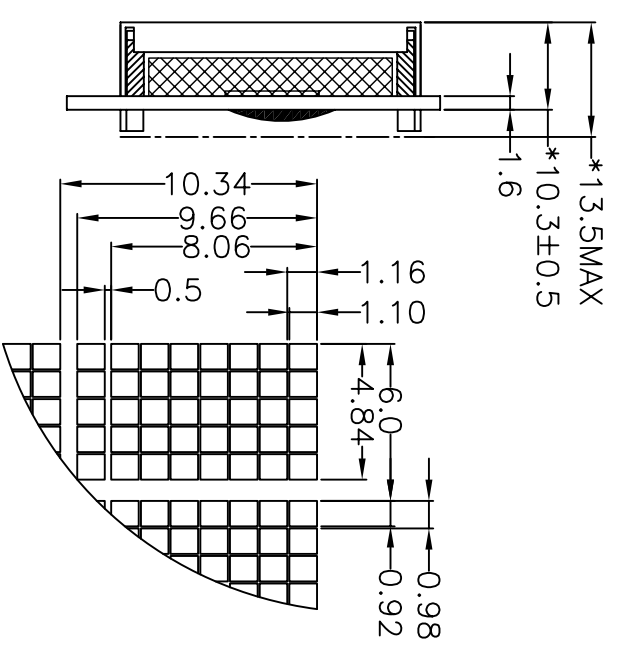


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	APR-02-2008
B	Change Backlight parameter	APR-03-2008
C	Change VLCD	APR-07-2008

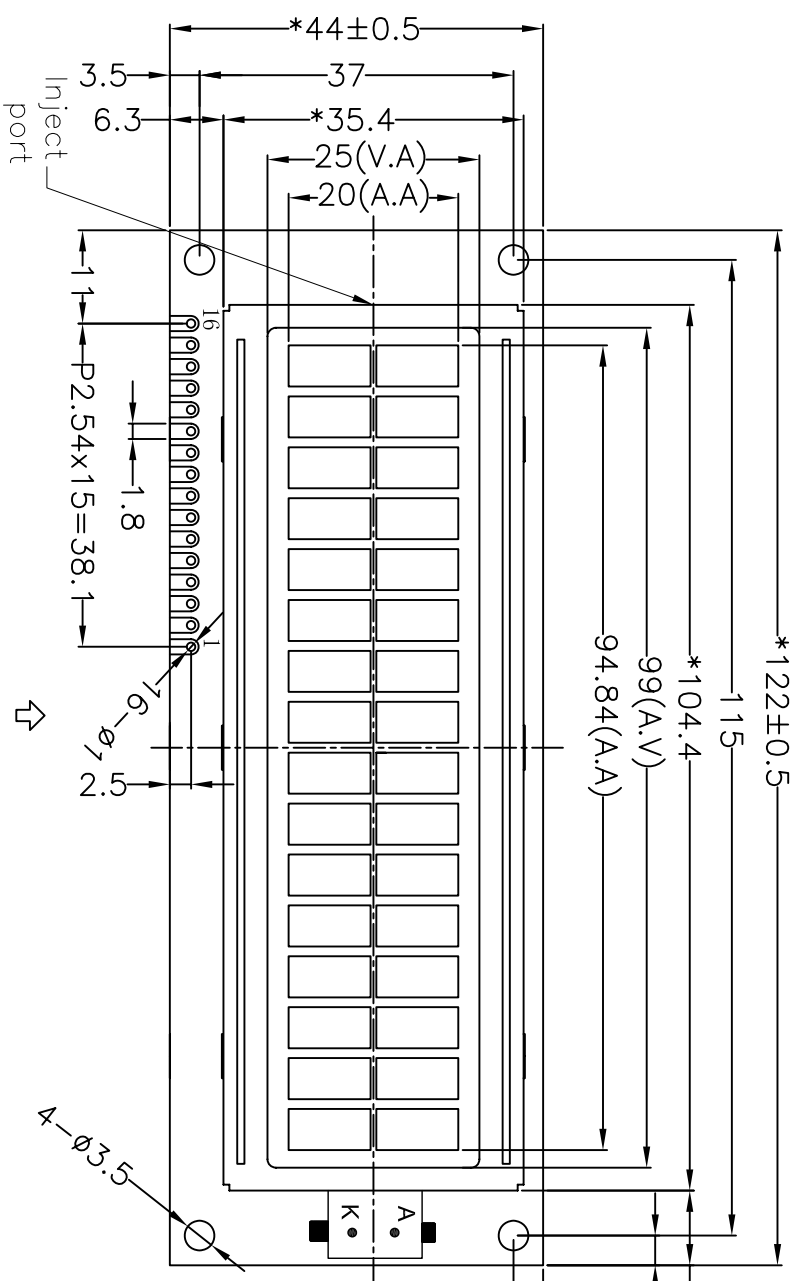

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V(Ref), VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Positive/Transflective/Gray
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Backlight: Array Yellow-Green Vf=5.0V Ifmax=280mA
- 7). Dimensions with mark "\*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTION	LEDK	LEDA	VSS	VDD	V0	RS	R/W	E
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

DOTS SIZE

**深圳秋田微电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002C39-GHY-R				SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
		DO NOT SCALE THIS DRAWING.		APP: 签字	DATE 日期
				CHK: 签字	
				DWN: 日期	