


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAY-22-2006

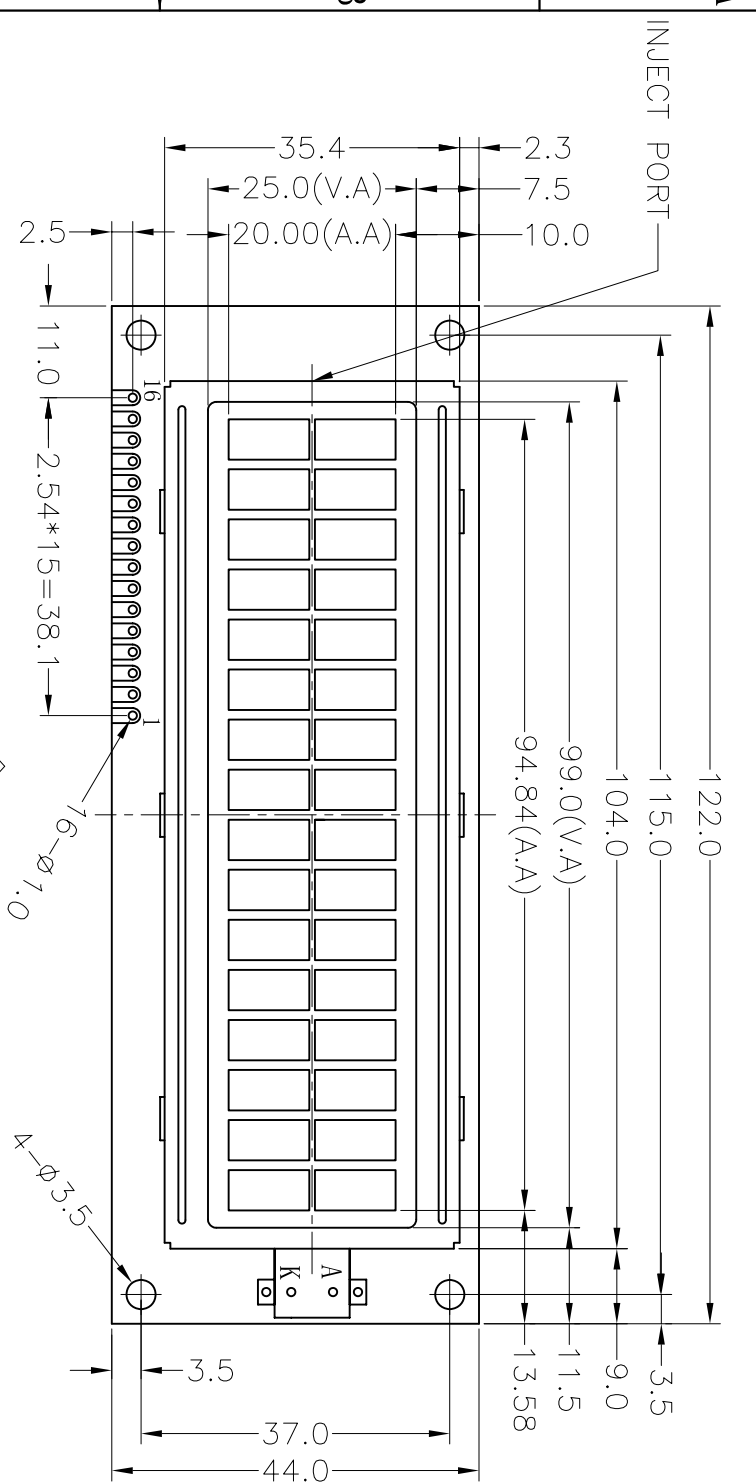


VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:5.0V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Transflective/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Drive ic: SPLC780D-001B-C
- 7). Backlight:bottom, Yellow-green,
- 8). Dimensions with mark "*" are important, with mark "()" are referenced
- 9). Meet for RoHS

PIN	1	2	3	4	5	6	7	8
CONNECTOR	LEDK	LEDA	VSS	VDD	VO	RS	R/W	E
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

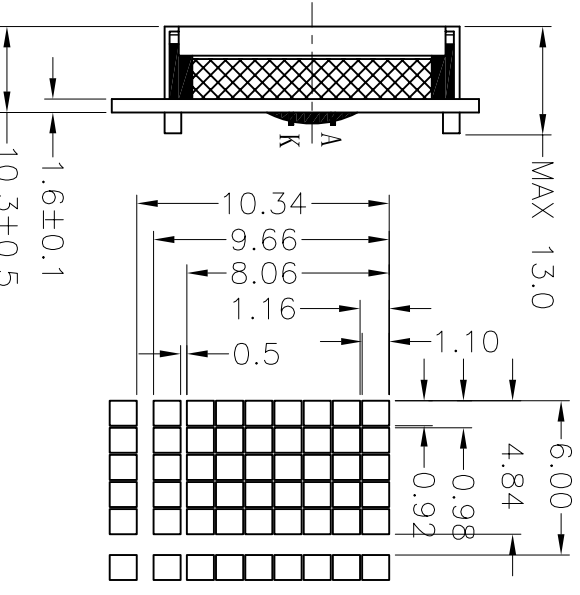

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAY-HY-1602E-201-R-00			HY-1602E-201-R
SCALE 比例		FIT 适应图面	
SHEET: 页次		1 OF 1	
GENERAL TOL: 公差		±0.3	
APP: 签字	APPROVALS	UNIT 单位	DATE 日期
CHK:		mm	
DWN:			