



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAR-11-2005

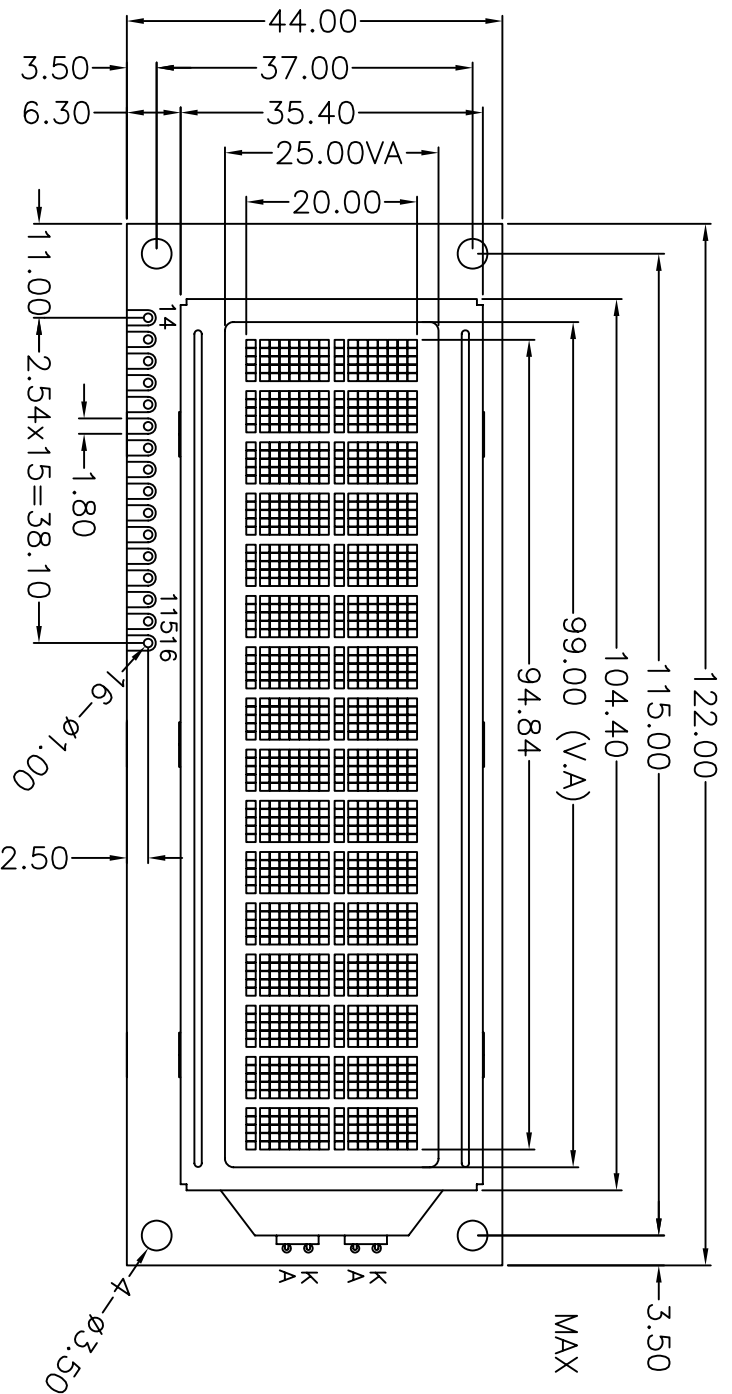

DOT SIZE
SCALE 2:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CONNECTOR	VSS	VDD	V0	RS	R/W	E	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	LED	LEDK

VIEWING DIRECTION

-Specification:

- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:5.0V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Transmissive/Grey
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Drive ic: SPLC780
- 7). Backlight: Side Green
- 8). Dimensions with mark "*" are important, with mark "()" are referenced

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO:	C/D	PROJECTION	MODEL NUMBER
零件编号		三角法	模组型号
FAV-ABC016002C00-00			ABC016002C00-GHG
SCALE: FTI 适应图面		DO NOT SCALE THIS DRAWING.	
SHEET: 1 OF 1	UNIT: mm	APP: _____	DATE: _____
GENERAL TOL: ±0.3	未注公差	CHK: _____	
APPROVALS	签字	DWN: _____	