
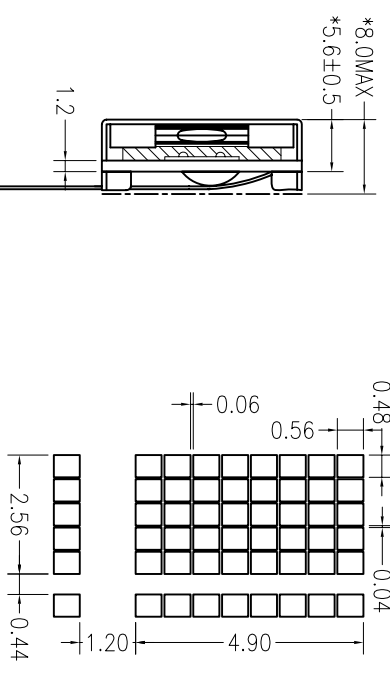
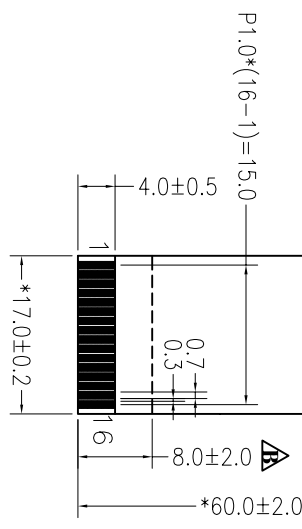
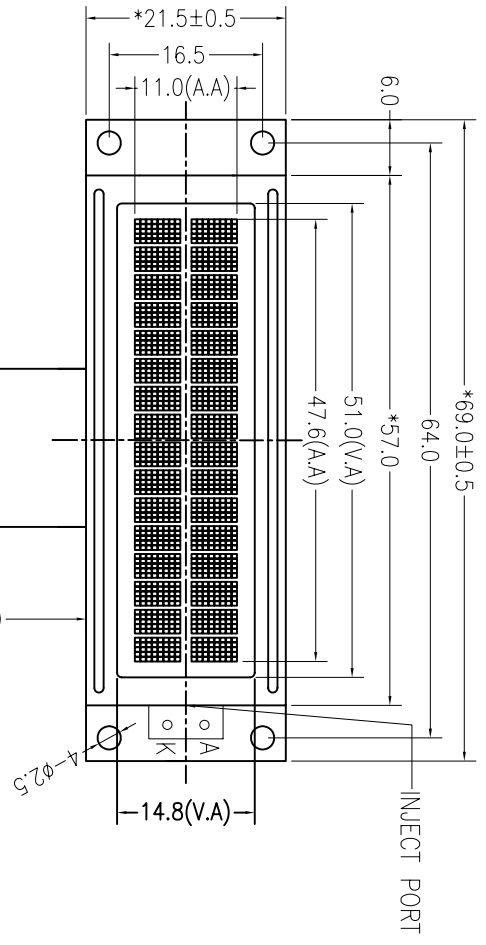


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	MAR-24-2008
B	Change design Δ	MAY-08-2008



PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/16,Bias:1/5, VLCD:4.5V(Ref.), VDD:5.0V
- 2). Viewing angle: 6.0'clock
- 3). Display mode:STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D1-001A-C (or compatible)
- 6). Backlight: Edge White Vf=5.0V Ifmax=80mA
- 7). Dimensions with mark "()" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant



深圳秋田电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE: 比例	FIT 适应图面
ABC016002K05-BIW-R	ABC016002K05-BIW-R			SHEET: 页次	1 OF 1
ABC016002K05-BIW-R				GENERAL TOL: 公差	±0.3
				APP: 签字	
				CHK: 日期	
				DWN: 日期	