
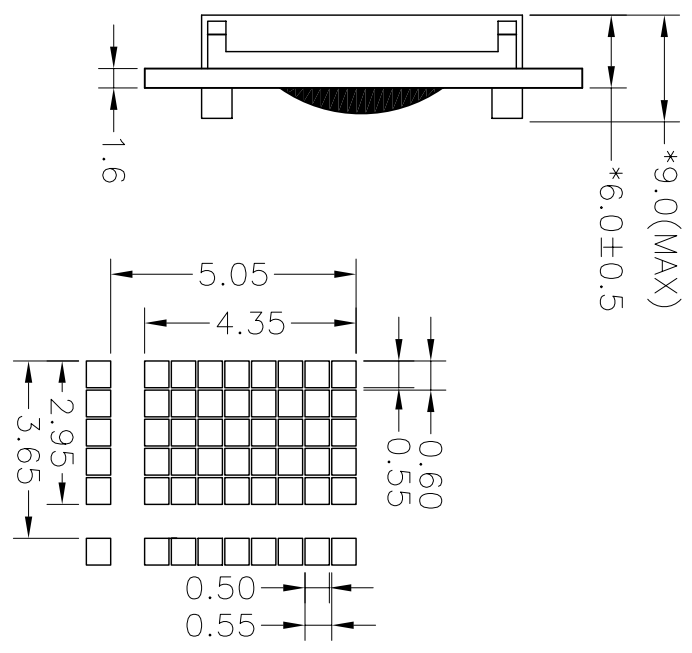


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	SEP-03-2005
B	Change LOGO and RoHS	Mar-12-2008

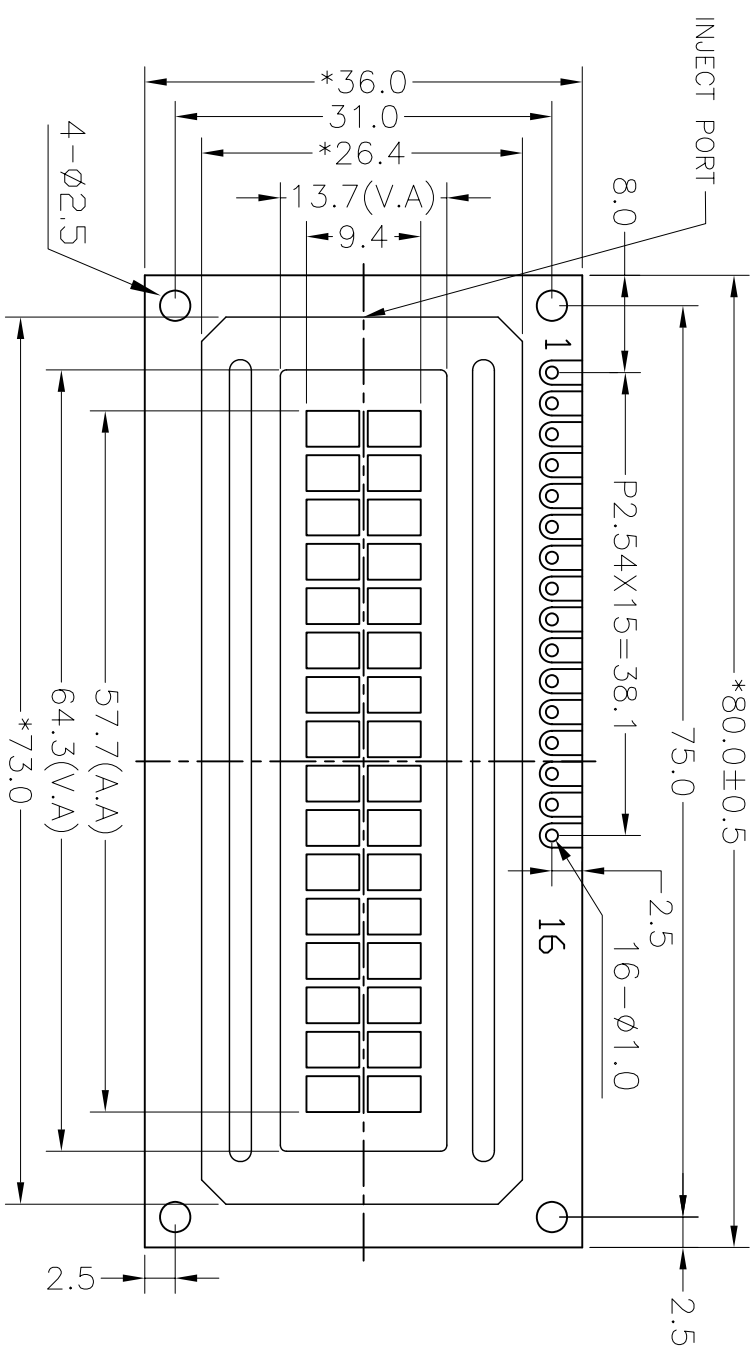

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.7V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Reflective/Y-G
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Drive ic: SPLC780D-001B-C(or compatible)
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

DOT SIZE
SCALE: 4:1

深圳秋田微电子有限公司
SHENZHEN AYO-ELECTRONICS CO., LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002B03-YGN-R			ABC016002B03-YGN-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE 日期	
				APP: 签字	
				CHK: 签字	
				DWN: 签字	

DO NOT SCALE THIS DRAWING.