
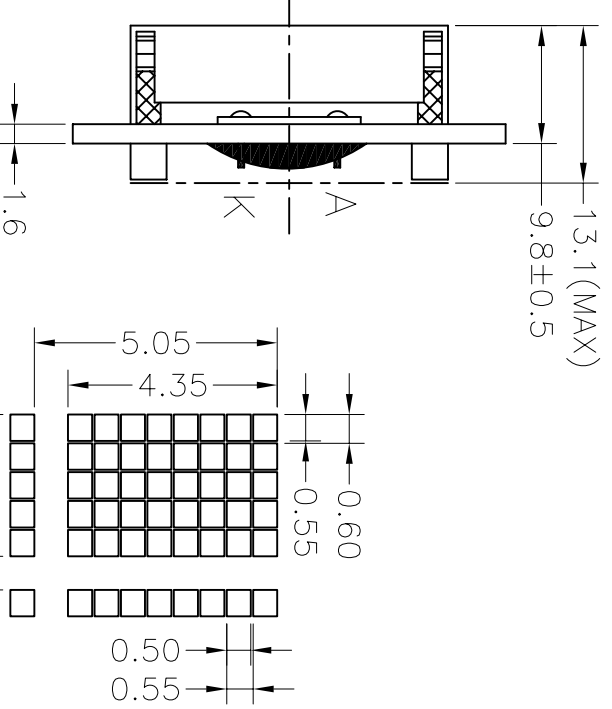


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JAN-11-2006

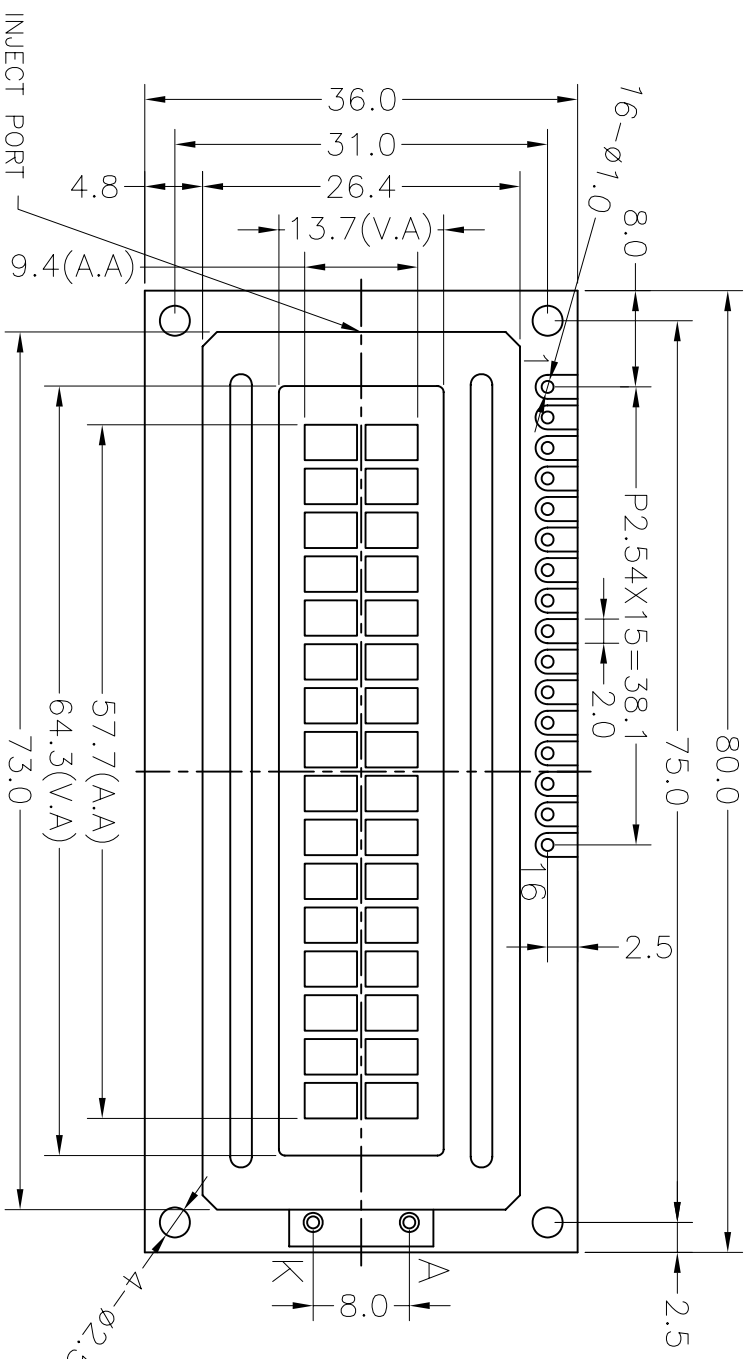

VIEWING DIRECTION

DOTS SIZE  
SCALE 4:1

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:3.9V,VDD:4.5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Y-G/Positive/Transflective
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC:S6A0069-04
- 6). Backlight: Bottom Y-G
- 7). Dimensions with mark "\*" are important,  
with mark "()" are referenced

		<b>深圳秋田视佳实业有限公司</b> <b>SHENZHEN AV-DISPLAY CO., LTD</b>	
PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-ABC016002B04-00			ABC016002B04-YHY
SCALE: FTI 适应图面		SHEET: 1 OF 1	
GENERAL TOL: ±0.3		UNIT: mm	
APPROVALS		DATE	
APP:	CHK:	DWN:	