

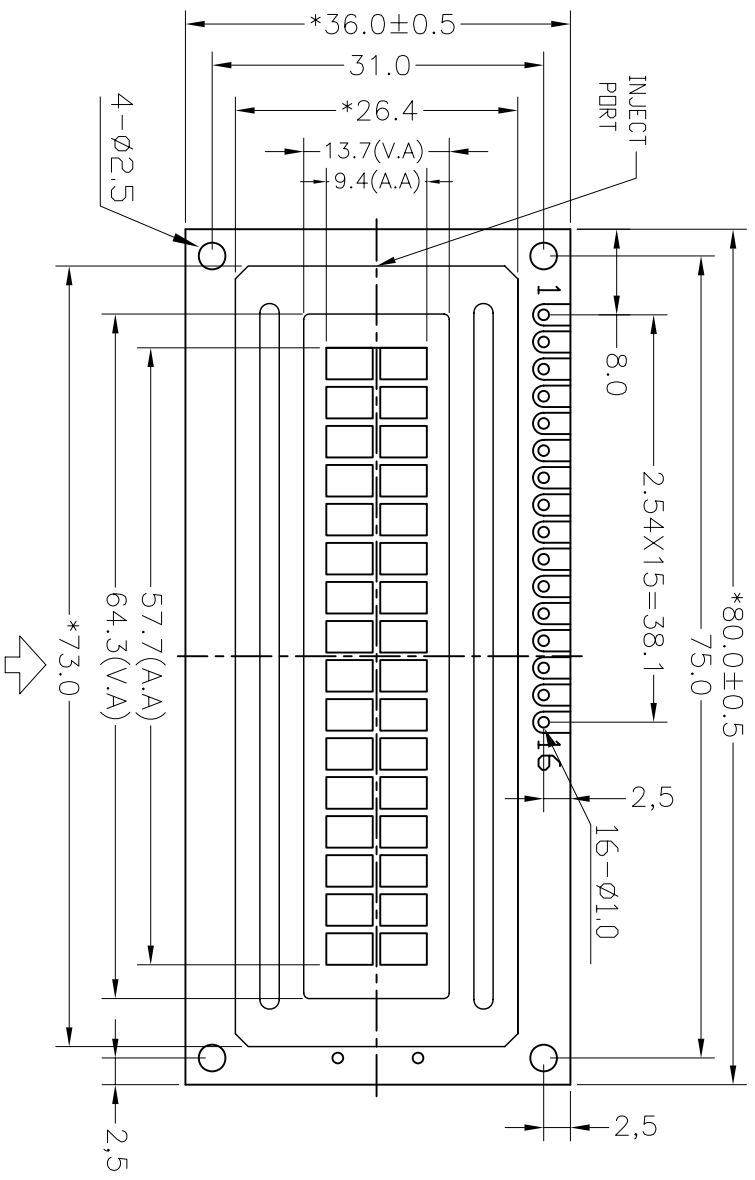


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Dec-07-2007

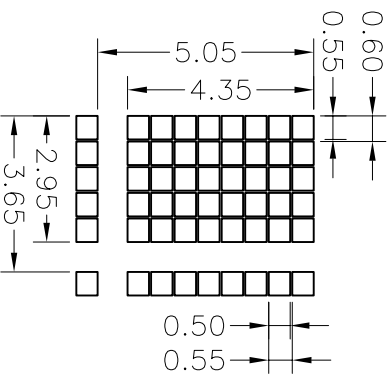


VIEWING DIRECTION

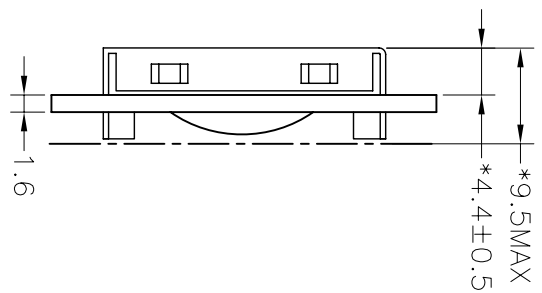



DOT SIZE
SCALE: 4:1

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:3.9V
 - 2). Viewing direction: 6 O'clock
 - 3). Display mode: STN/Positive/Reflective/Gray
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Drive IC: SPLC780D1-001A(Or Compatible)
 - 7). Backlight: None
 - 8). Dimensions with mark "*" are important, with mark "(") are referenced
 - 9). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FIG 适应图面
ABC016002B06-GGN-R			ABC016002B06-GGN-R	SHEET: 页次	1 OF 1
APPROVALS 签字			UNIT 单位 mm	DATE 日期	
APP: 洪俊斌			DATE		
CHK: 邵飞兰			DATE		
DWN: 郑学东			DATE		

DO NOT SCALE THIS DRAWING.