
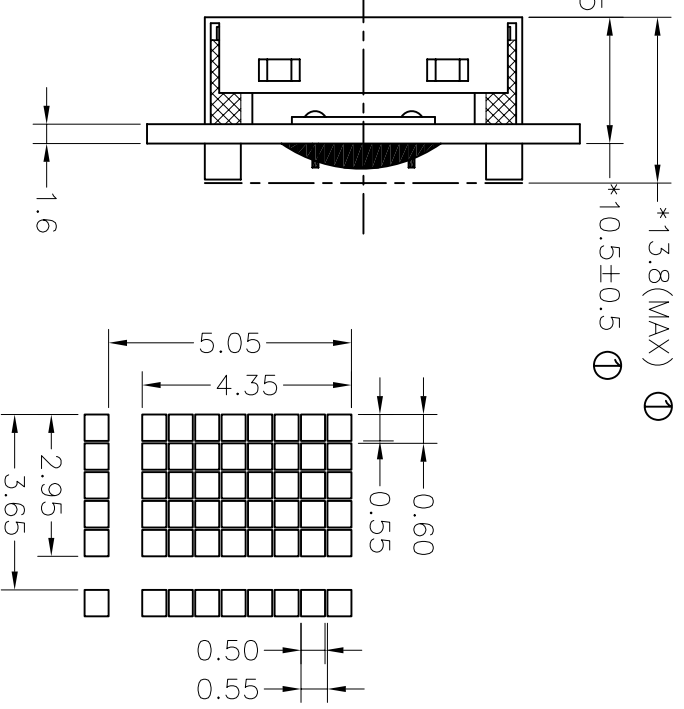


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	JUL-11-2005
B	Change IC; Change LCD temp; Change DIM	AUG-10-2005
C	Change IC and RoHS	DEC-27-2007
D	Change model number	JAN-23-2008

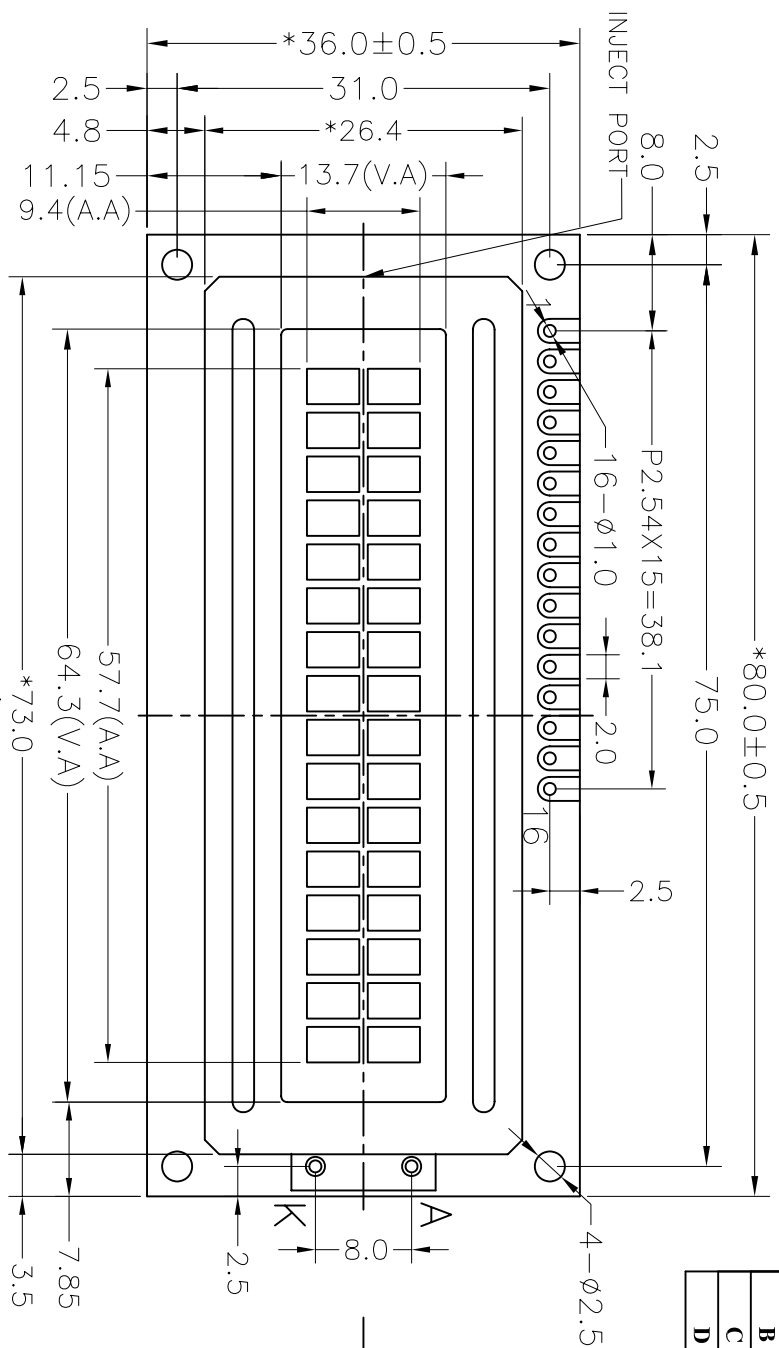

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.2V, VDD:5.0V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Y-G/Positive/Transmissive/Anti-UV
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D-001B-C(or compatible)
- 6). Backlight: Bottom, Y-G
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). LCD prevent from ultraviolet radiation
- 9). All the raw materials are RoHS compliant.

VIEWING DIRECTION

DOTS SIZE
SCALE 4:1

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK



深圳秋田电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002B02-Y1Y-R			ABC016002B02-Y1Y-R	1 OF 1	
				SHEET: 1	UNIT 单位 mm
				GENERAL TOL: ±0.3	DATE 日期
				APPROVALS 签字	
				CHK:	
				DWN:	