




REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Oct-10-2007

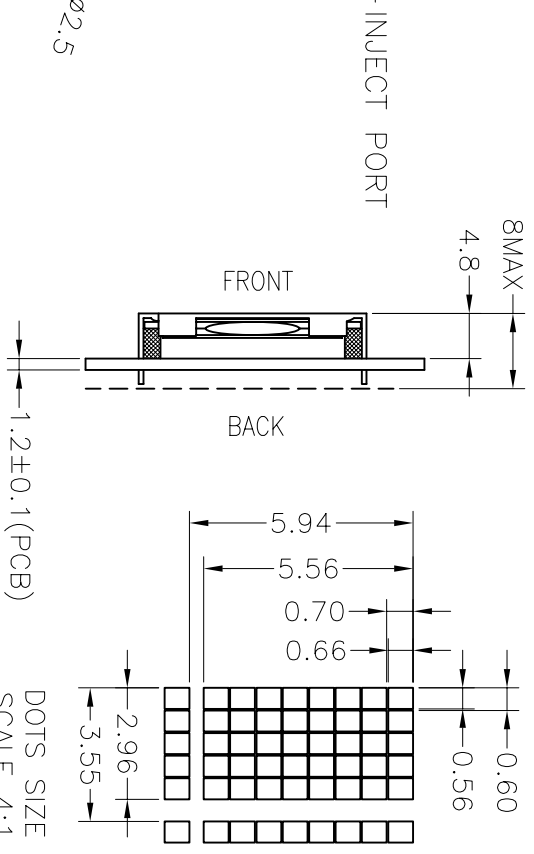

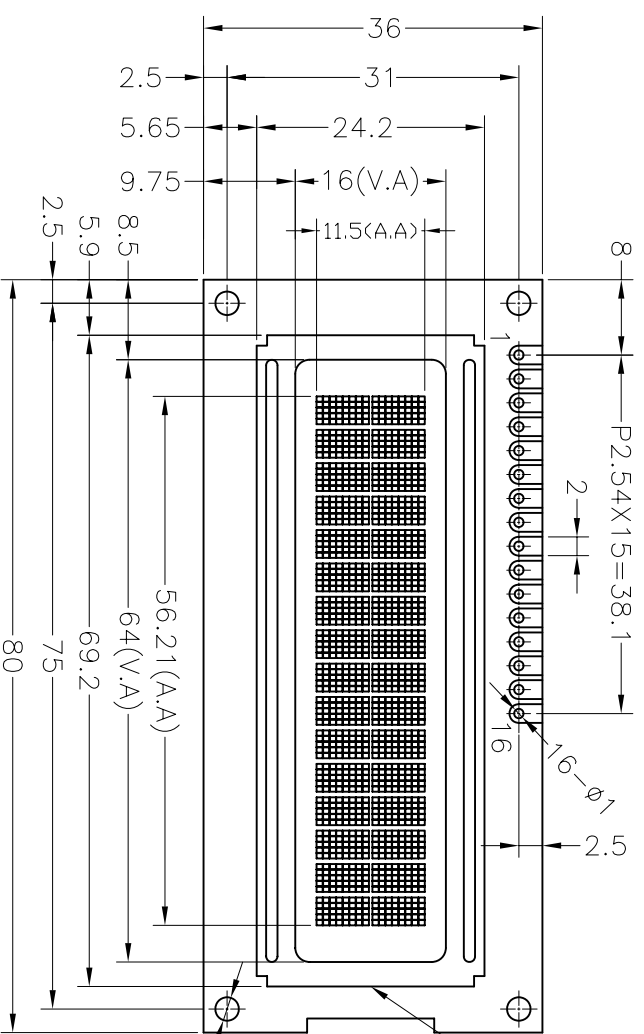

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
 - 2). Viewing angle: 6 0'clock
 - 3). Display mode: STN/Positive/Reflective/Y-G
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Backlight: None
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced
 - 8). All the raw materials are RoHS complicant



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002E02-YGN-R-01			ABC016002E02-YGN-R-01	SHEET: 页次	1 OF 1
			DO NOT SCALE THIS DRAWING.	GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE	日期
				APP: 代客	Oct-10-2007
				CHK: 邵飞兰	Oct-10-2007
				DWN: 胡华峰	Oct-10-2007