
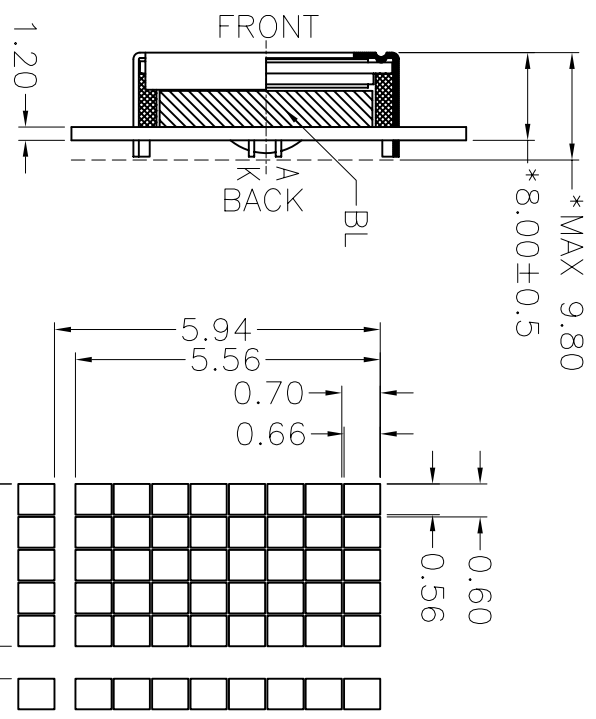


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	NOV-23-2005
A01	Change to transmissive	NOV-26-2005
A02	RoHS	Apr-13-2007

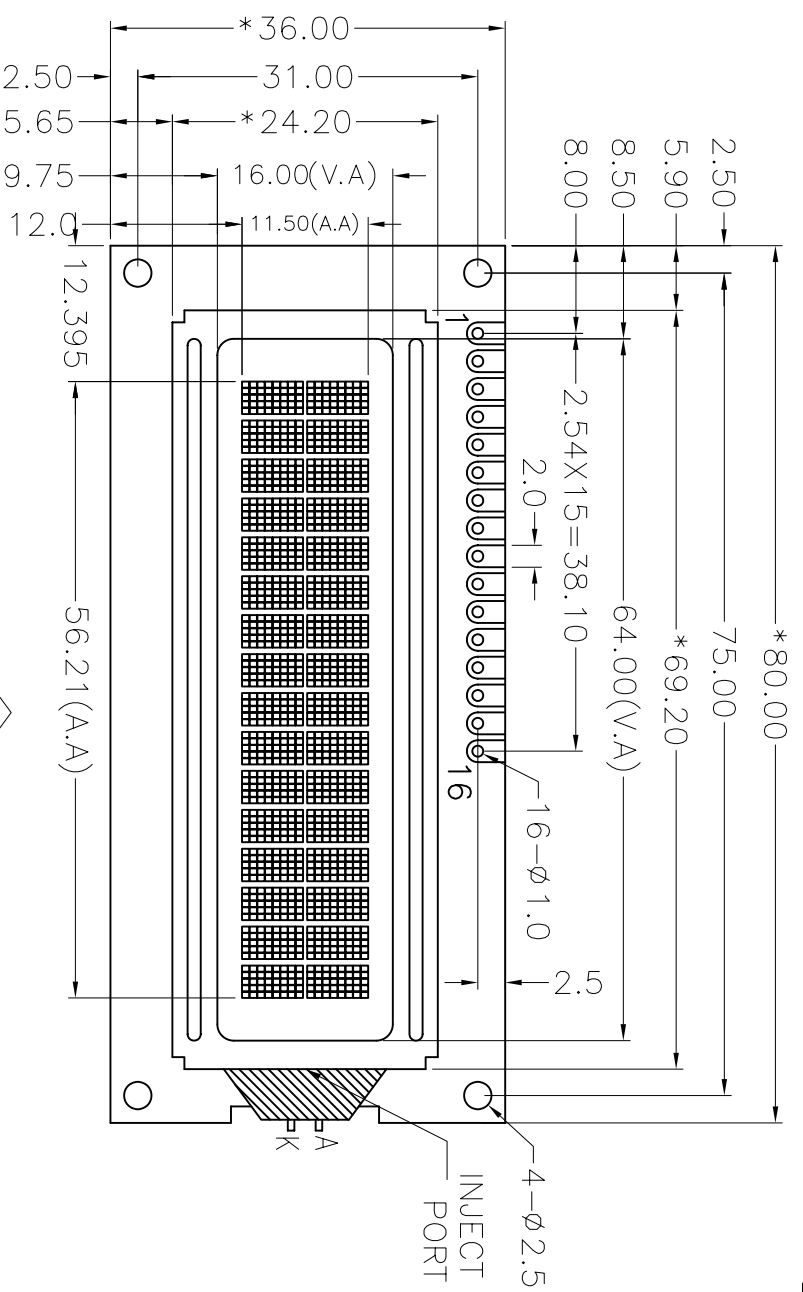

Specification:

- 1). Driving: Duty: 1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: FSTN/Negative/Transmissive Φ
- 4). Operating temp.: $-20^{\circ}\text{C}\sim+70^{\circ}\text{C}$
Storage temp.: $-30^{\circ}\text{C}\sim+80^{\circ}\text{C}$
- 5). IC:S6A0069-22(English-Russian)
- 6). Backlight: Side, White
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant. Φ

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAY-ABC016002E16-R-02			ABC016002E16-AHW-R
SCALE: FT 适应图面		SHEET: 1 OF 1	
GENERAL TOL: ±0.3		UNIT 单位: mm	
APPROVALS 签字		DATE 日期	
CHK:	DWN:		

DO NOT SCALE THIS DRAWING.