


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-02-2006
A01	Update drawing	JAN-05-2007




VIEWING DIRECTION

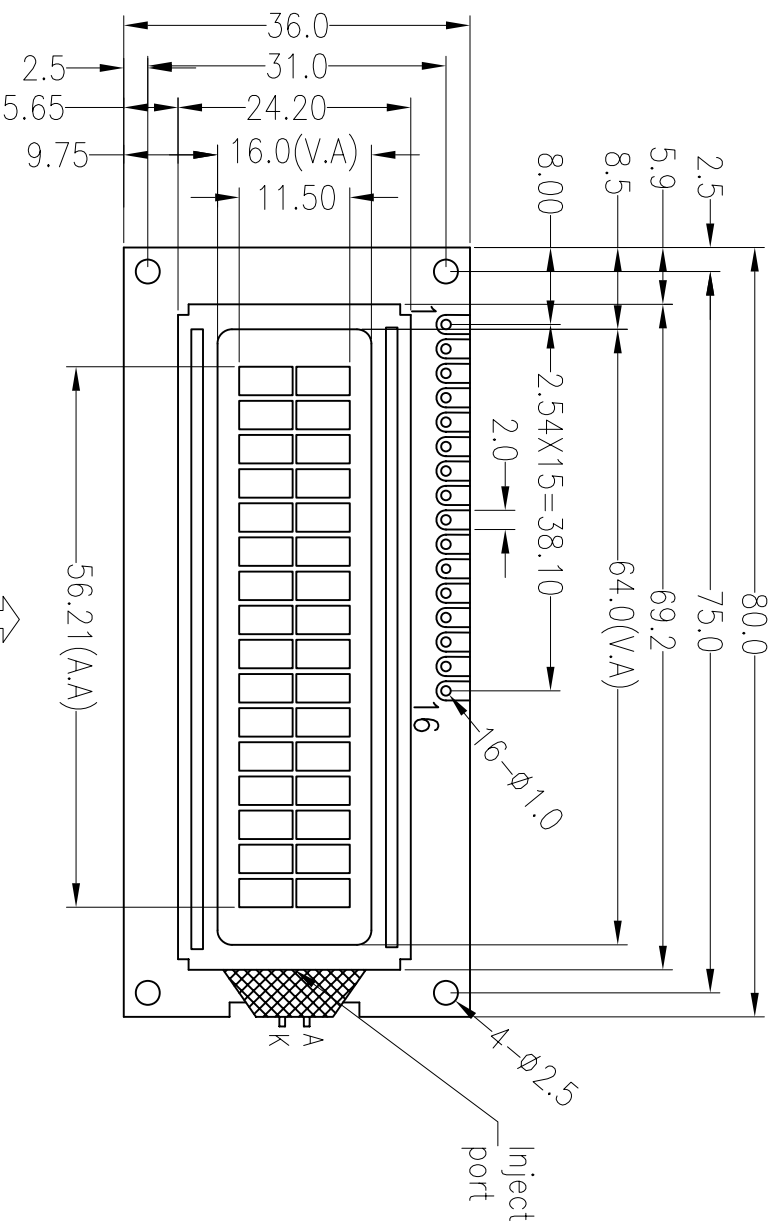

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing Direction: 6 o'clock
- 3). Display mode: FSTN/Negative/Transmissive
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 5). IC: S6A0069-22
- 6). Backlight: Side Amber
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS complicant

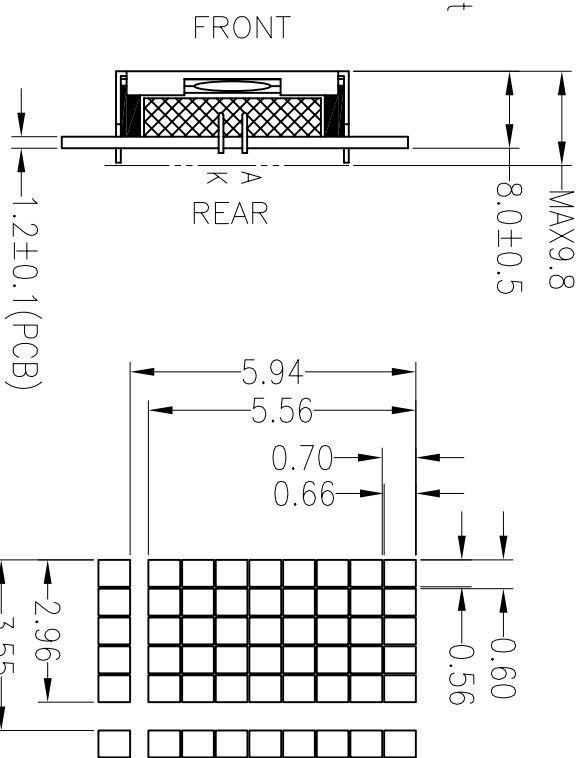

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

FAV 深圳市秋田视佳实业有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编码	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE: 比例	FTT 适应图面
FAV-ABC016002E32-R-01			ABC016002E32-MIA-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT: 单位	mm
				APPROVALS 签字	DATE 日期
				CHK: DWN:	

DO NOT SCALE THIS DRAWING.