



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	NOV-22-2006

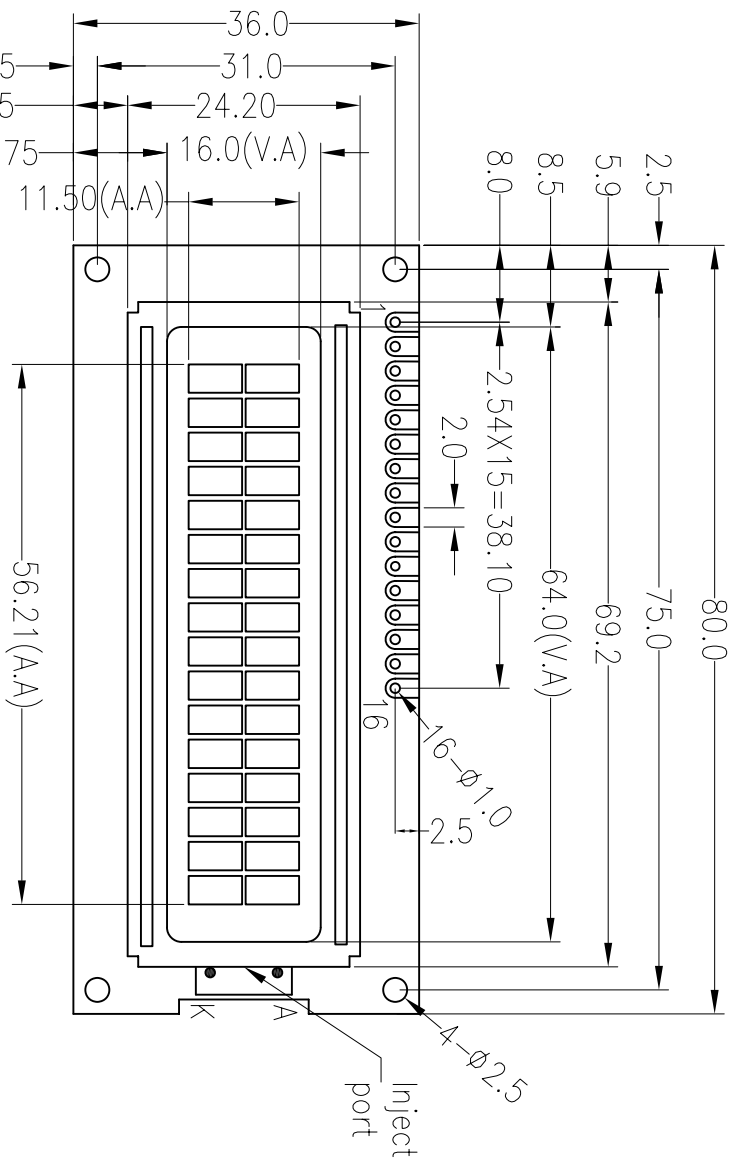

VIEWING DIRECTION

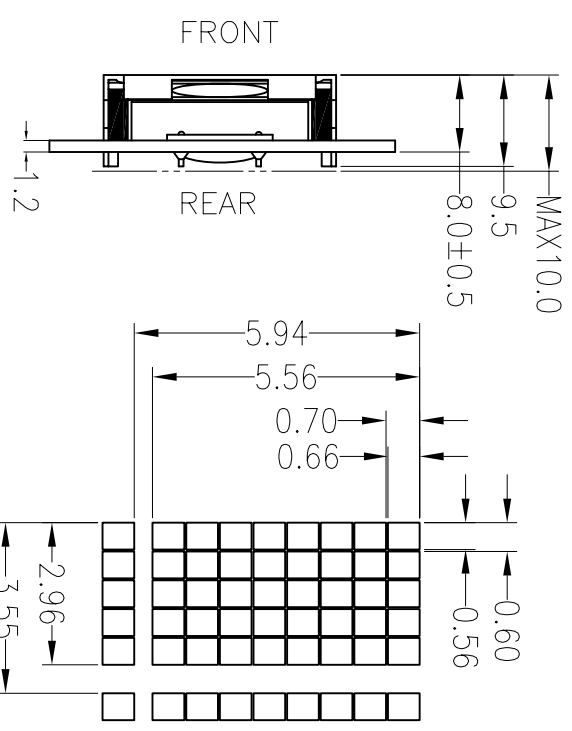

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V(Ref.), VDD:5.0V
  - 2). Viewing Direction: 6 O'clock
  - 3). Display mode:STN/Grey/Positive/Transflective
  - 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
  - 5). IC: SPLC780D-001B-C
  - 6). Backlight: Bottom Y-G
  - 7). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 8). Meet for RoHS

**深圳市秋田视佳实业有限公司**  
SHENZHEN AV-DISPLAY CO., LTD.

PART NO: 零件编号	CD	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
FAV-ABC016002E15-R-00			ABC016002E15-GHY-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE 日期	
				APP: 签字	
				CHK: 签字	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.