
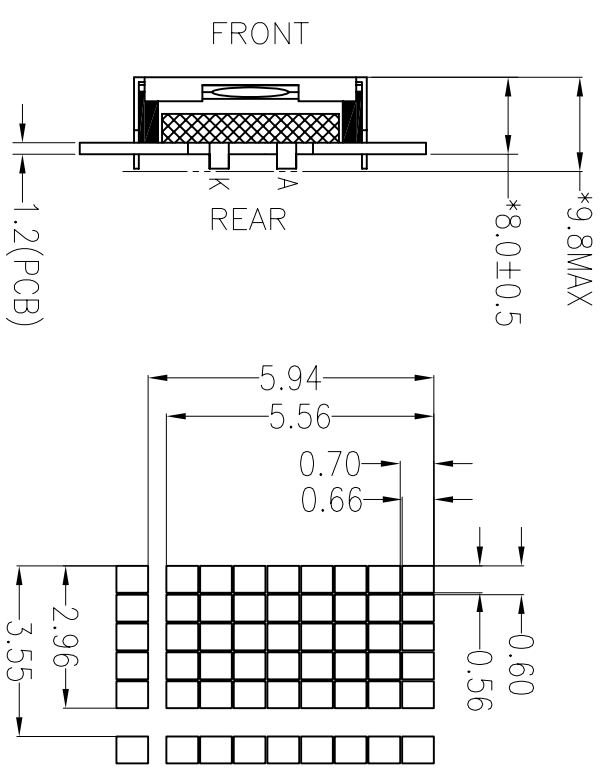


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	NOV-01-2007

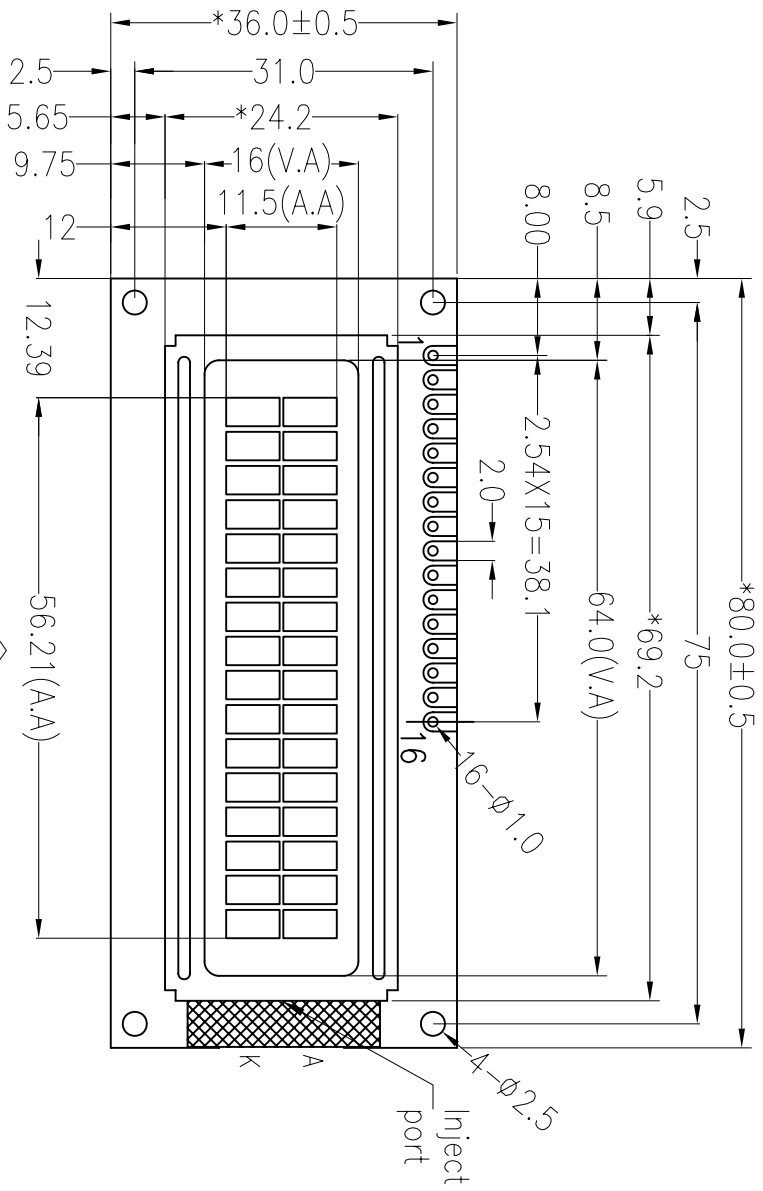


PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK


VIEWING DIRECTION →

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing Direction: 6 o'clock
- 3). Display mode: FSTN/Negative/Transmissive
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D-002A-C
- 6). Backlight: EDGE, RED
- 7). Dimensions with mark "\*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant



**深圳秋田微电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE: 比例	FTT 适应图面
ABC016002E45-MIR-R-01			ABC016002E45-MIR-R-01	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPROVALS 签字	UNIT 单位 mm
				CHK: DWN:	DATE 日期

DO NOT SCALE THIS DRAWING.