


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	MAR-20-2007
A01	Change IC & Modify PCB	SEP-21-2007
B	Change dimension	Nov-05-2007




VIEWING DIRECTION

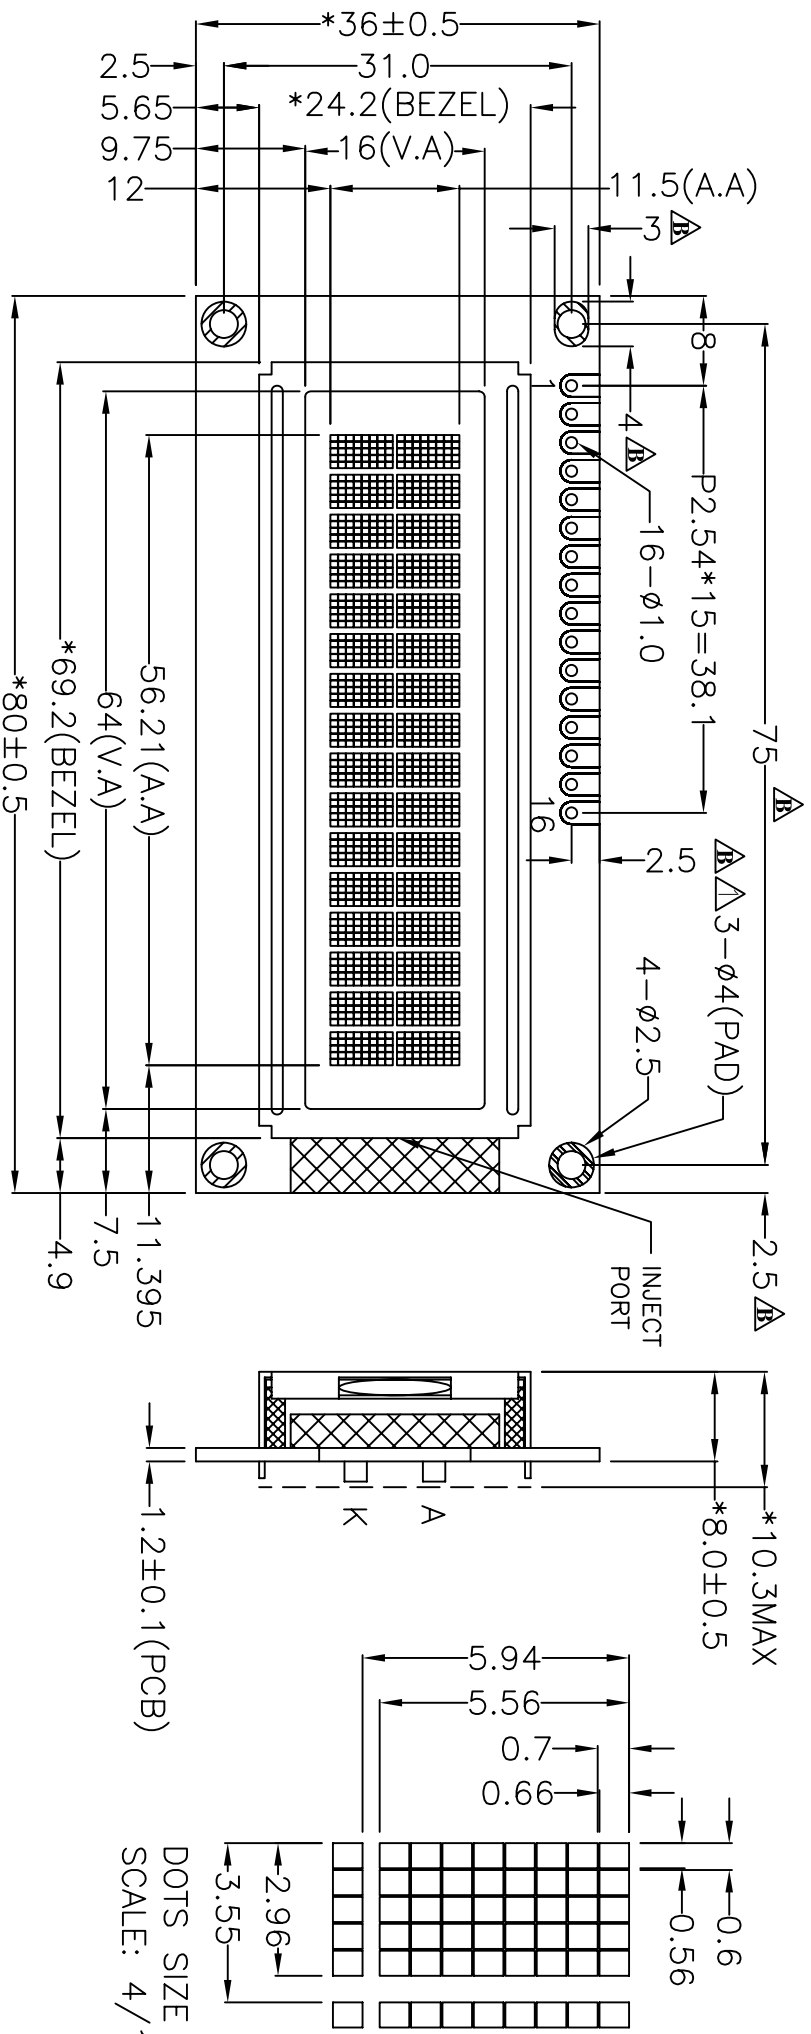

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, Vlcd:4.5V, Vdd:5.0V
  - 2). Viewing direction: 6 O'clock
  - 3). Display mode: STN/Positive/Transflective/Grey
  - 4). Operating temp.:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$   
Storage temp.:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
  - 5). IC: SPLC780D-001B-C
  - 6). Backlight type: Edge White(4.0V 30mA)
  - 7). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

DOTS SIZE  
SCALE: 4/1



**深圳秋田电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	APPROVALS 签字	UNIT 单位 DATE 日期
ABC016002E41-GHW-R			ABC016002E41-GHW-R	APP: CHK: DWN:	

SCALE: FIT 适应图面  
SHEET: 1 OF 1  
GENERAL TOL:  $\pm 0.3$   
未注公差

DO NOT SCALE THIS DRAWING.