
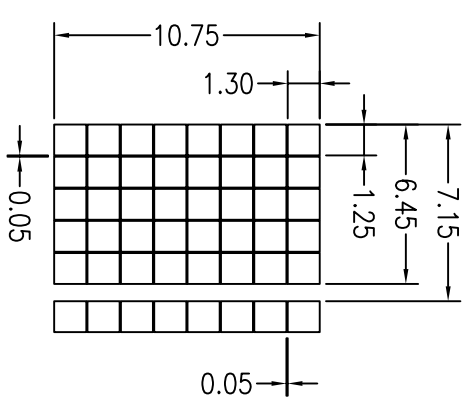
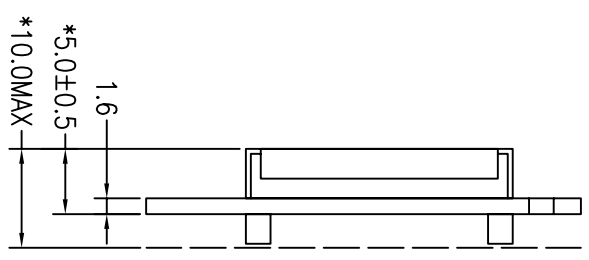
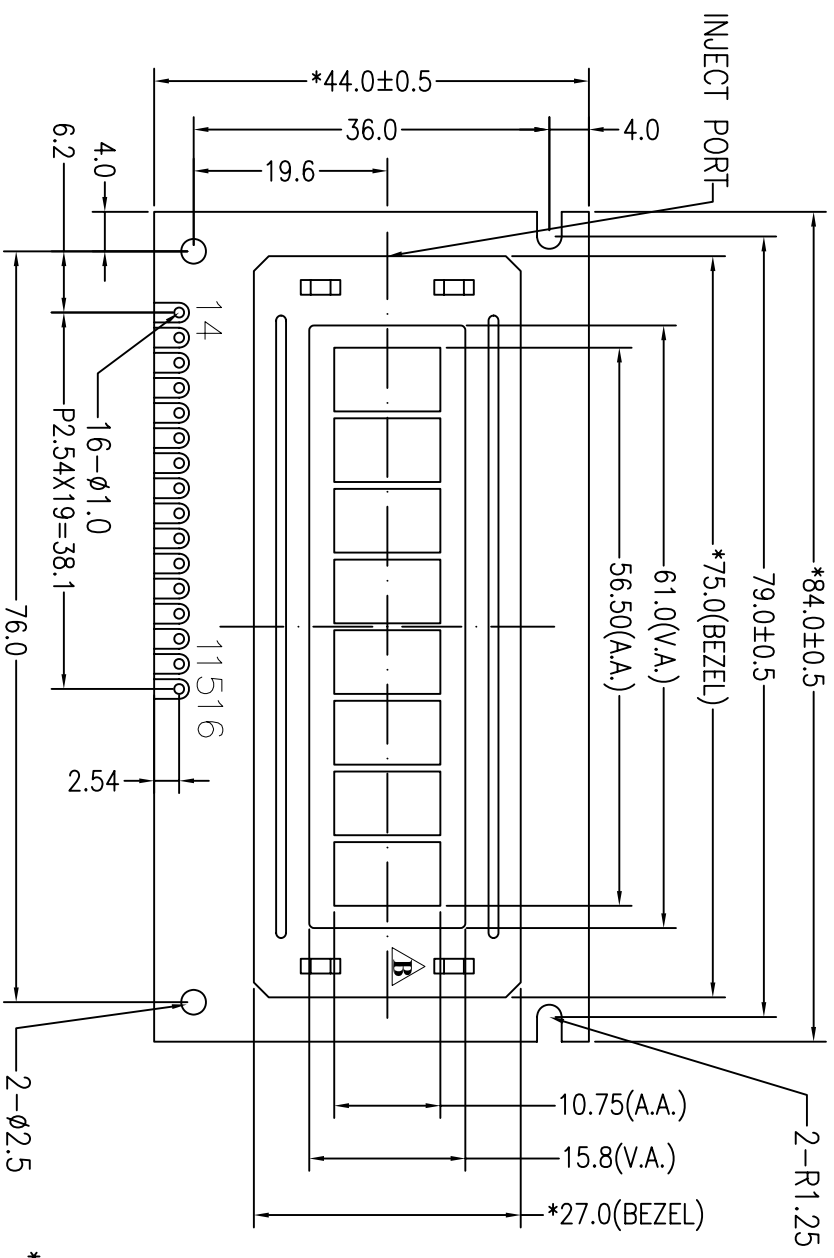



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	AUG-20-2007
B	Change TK Design 	MAR-24-2008



DOT SIZE
SCALE 2.5:1



PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDK	LEDA

- Specification:
- 1). Driving: Duty:1/8, Bias:1/4, VLCD:4.8V, VDD:5.0V
 - 2). Viewing Direction: 6 O'clock
 - 3). Display mode:STN/Yellow-Green/Positive/Reflective
 - 4). Operating temp.: 0°C~+50°C
Storage temp.: -10°C~+60°C
 - 5). IC:SPLC780D-001B-C (Or Compatible)
 - 6). Dimensions with mark "*" are important,with mark "()" are referenced
 - 7). All the raw materials are RoHS compliant

VIEWING DIRECTION 



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FIT 适应图面
FAV-ABC008001B01-R-00			ABC008001B01-1A-NR	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APP: 签字	
				CHK: 日期	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.