REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	NOV-19-2007
B	Change Inject Port (B)	NOV-26-2007
C	Change TK Design (C)	MAR-24-2008

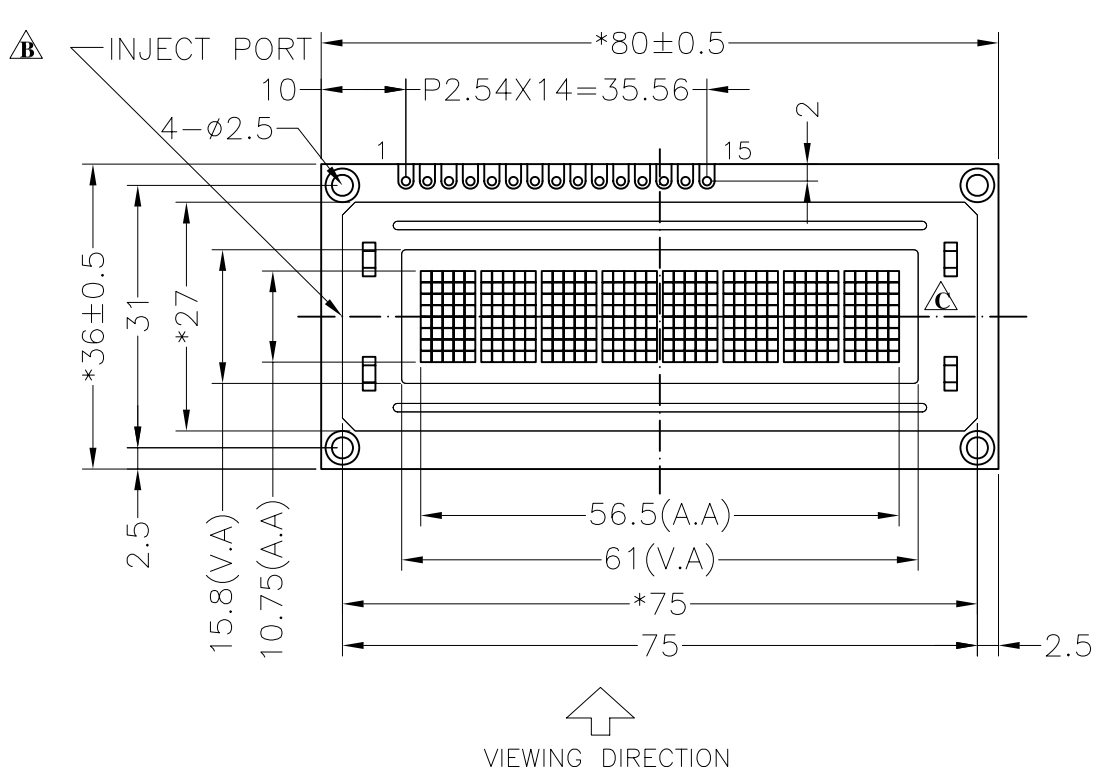

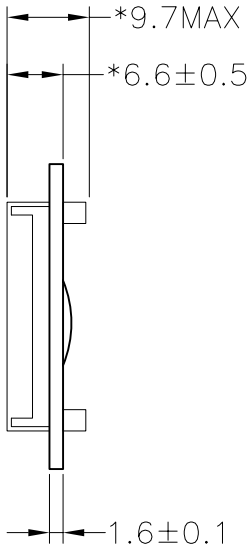

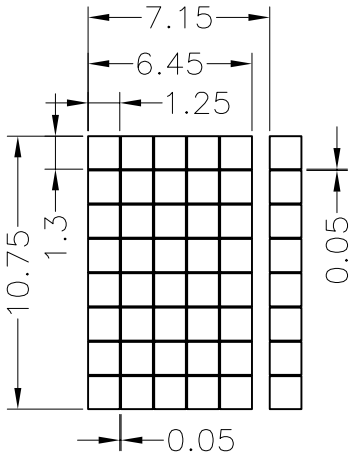

Specification:

1). Driving: Duty:1/8, Bias:1/4, VLCD:4.8V, VDD:5.0V
2). Viewing direction: 6 O'clock
3). Display mode: STN/Positive/Reflective/Y/G
4). Operating temp.:0°C~+50°C
Storage temp.: −10°C~+60°C
5). IC: SPLC780D−001B−C (Or Compatible)
6). Dimensions with mark "*" are important, with mark "()" are referenced
7). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	
CONNECTOR	VSS	VDD	VO	RS	R/W	E	DB0	
PIN	8	9	10	11	12	13	14	15
CONNECTOR	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC

深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

SCALE: 比例 FIT 适应图面				
SHEET: 页次 1 OF 1				
GENERAL TOL: 未注公差 ±0.3				UNIT 单位 mm
PART NO: 零件编码 C/D 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	APPROVALS 签字	DATE 日期
ABC008001C01-YAN-R		ABC008001C01-YAN-R	APP:	
		DO NOT SCALE THIS DRAWING.	CHK:	
			DWN:	