

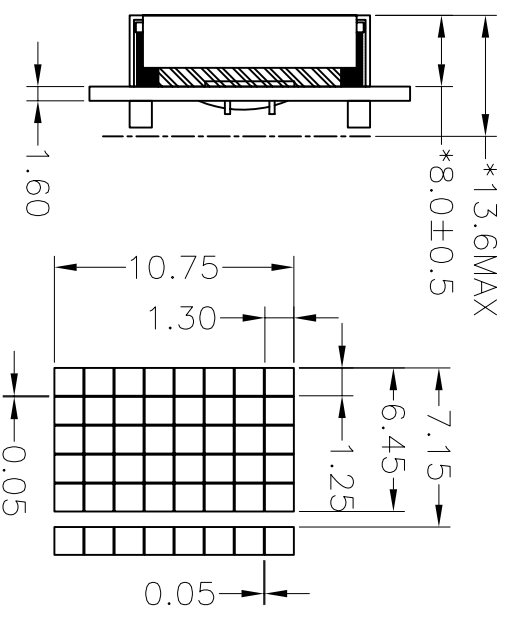


REV 版本	DESCRIPTION 描述	DATE 日期
A	Change Model AMC0801AR-B-Y6WFDY-SP	Jun-04-2008
B	Revised LCD Driving	Jun-18-2008

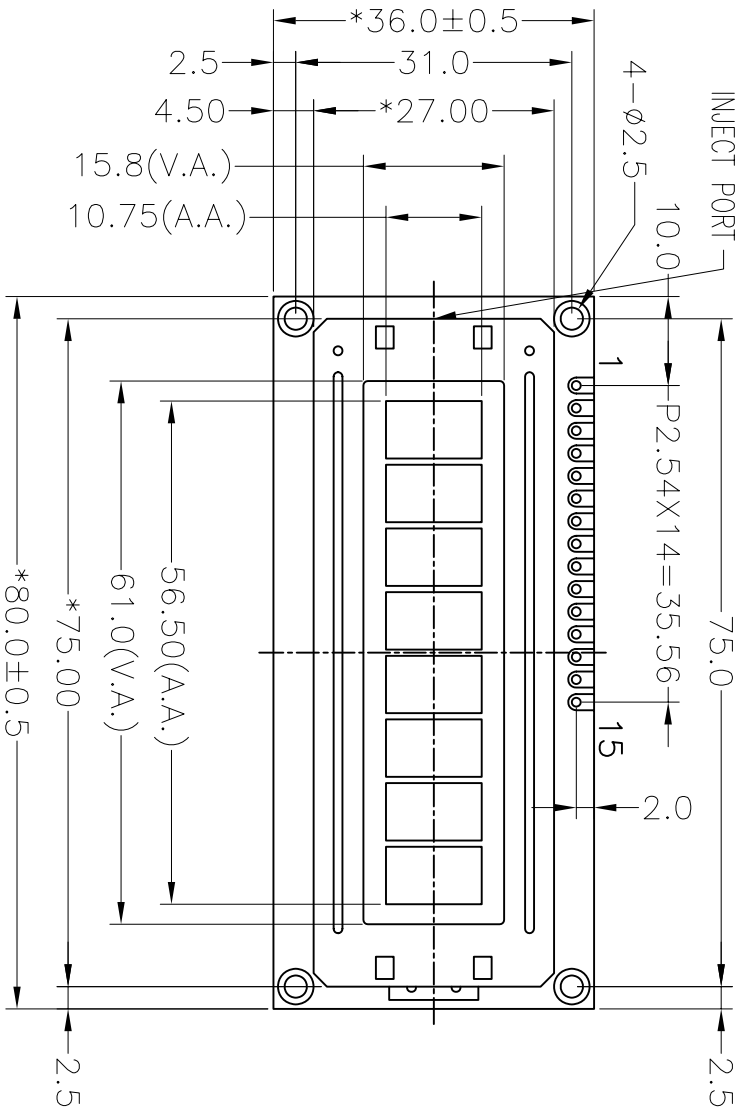

VIEWING DIRECTION

- Specification:
- 1). Driving: Duty:1/8, Bias:1/4, VLCD:5.4V(Ref), VDD:5.0V
  - 2). Viewing Direction: 6 O'clock
  - 3). Display mode: STN/Positive/Transflective/YG
  - 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
  - 5). IC: SPLC780D1-001A-C(Or Compatible)
  - 6). Backlight: Array Yellow-Green
  - 7). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 8). All the raw materials are RoHS compliant

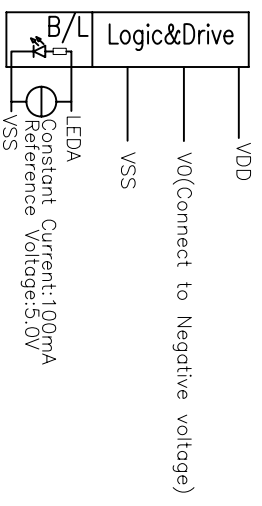

LCM POWER SUPPLY

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	

DOTS SIZE

**深圳秋田微电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC008001C00-YHY-R			ABC008001C00-YHY-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				DATE 日期	
				APP: 签字	
				CHK: 日期	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.