
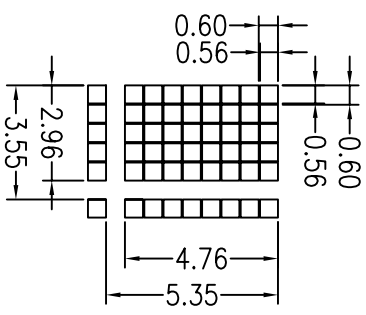
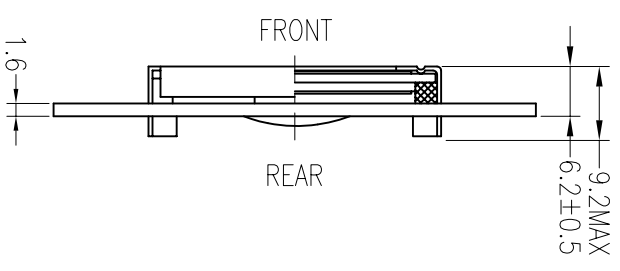


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	DEC-23-2004

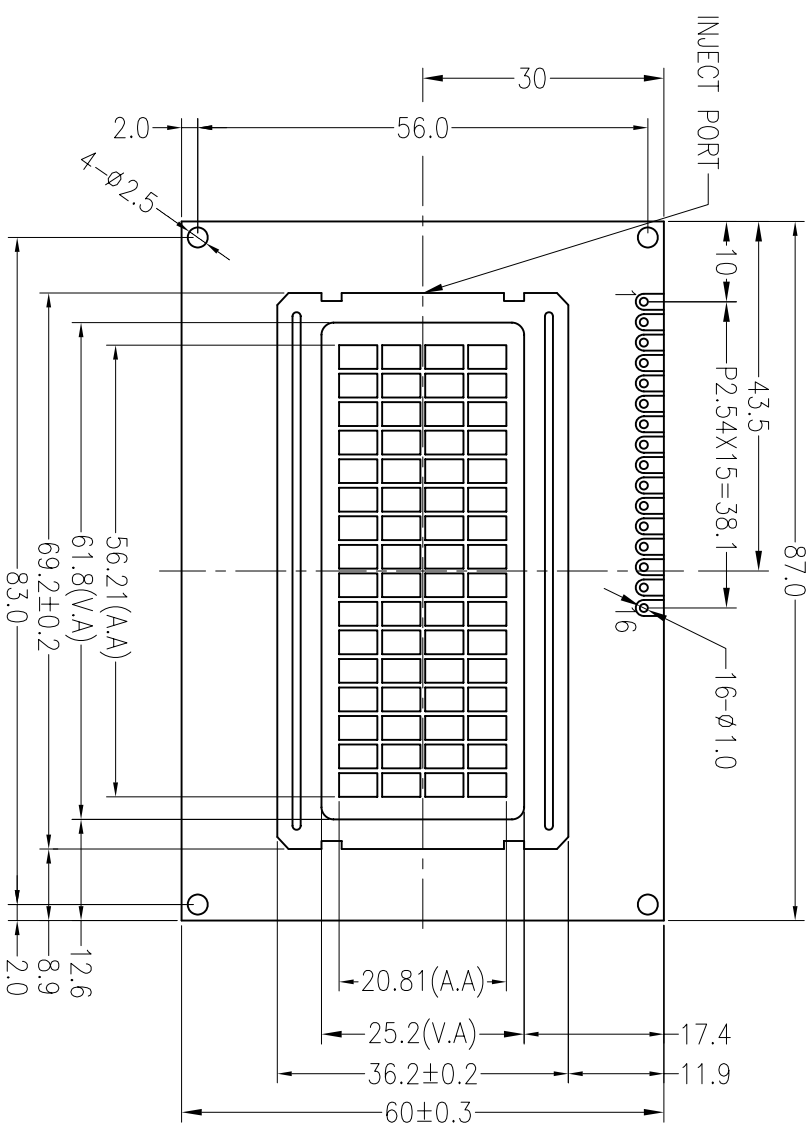

Specification:

- 1). Driving: Duty:1/16,Bias:1/4, VLCD:4.2V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:STN/Positive/Reflective/Grey
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). IC: S6A0069X01-COCX
- 6). Dimensions with mark "\*" are important, with mark "(") are referenced
- 7). Meet for RoHS

VIEWING DIRECTION

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

DOTS SIZE  
SCALE 4:1



**深圳市秋田视佳实业有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
FAV-ABC016004A10-R-00			ABC016004A10-GGN-R	1	OR 1
				SHEET: 页次	1
				GENERAL TOL: 公差	±0.3
				APPR: 签字	
				CHK: 签字	
				DWN: 签字	
				UNIT 单位	mm
				DATE 日期	

DO NOT SCALE THIS DRAWING.