
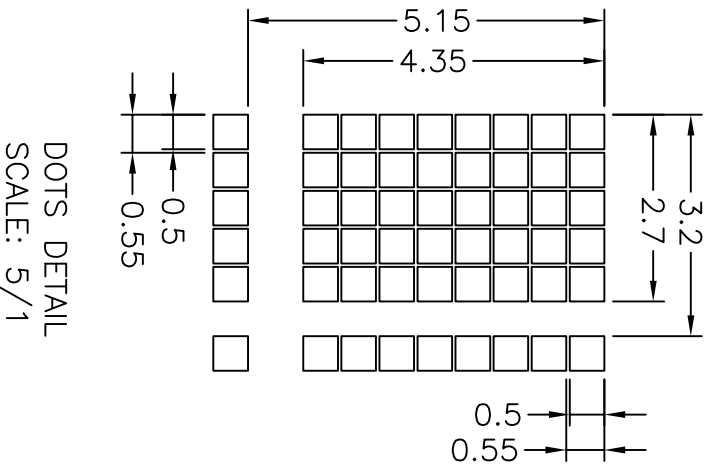
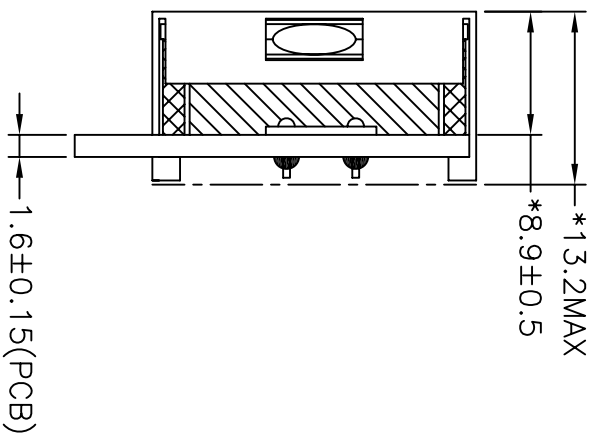


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Apr-08-2008

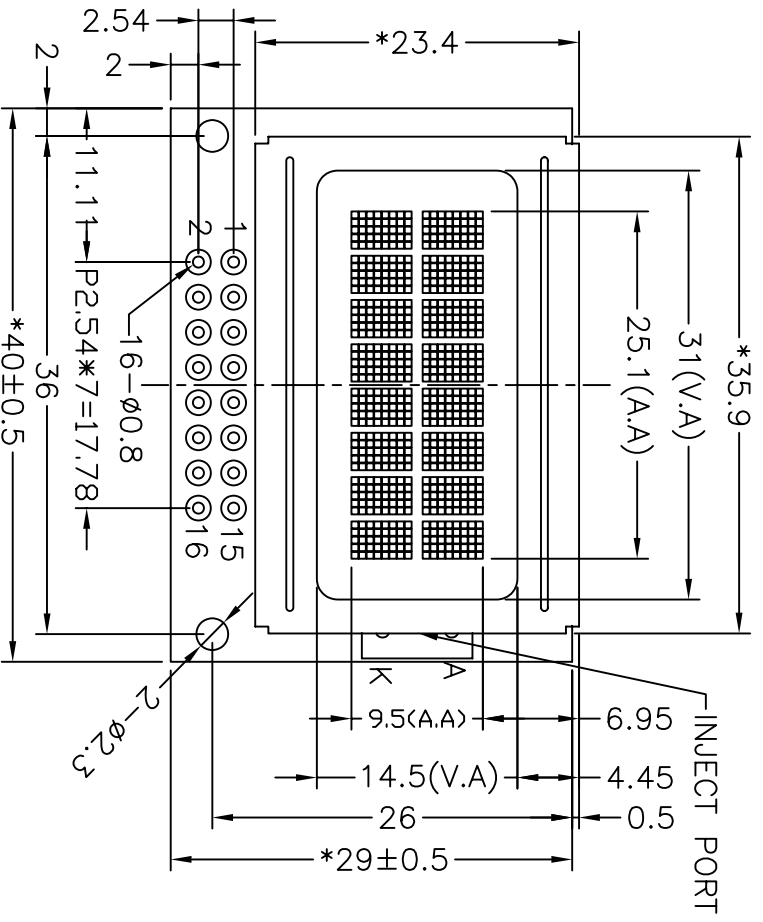

VIEWING DIRECTION

- Specification:
- 1). Driving: Duty:1/16, Bias:1/5, VDD:5.0V, VLCD:4.5V
  - 2). Viewing direction: 6 O'clock
  - 3). Display mode: STN/Positive/Transflective/Gray
  - 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
  - 5). IC:SPLC780D1-001(Or Compatible)
  - 6). Backlight: Bottom Yellow-green
  - 7). LCD Protect From Ultraviolet radiation
  - 8). Dimensions with mark "\*" are important, with mark "()" are referenced
  - 9). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTOR	R/W	E	RS	VO	VDD	VSS	LEDA	LEDK
PIN	9	10	11	12	13	14	15	16
CONNECTOR	DB0	DB7	DB1	DB6	DB2	DB5	DB3	DB4

DOTS DETAIL  
SCALE: 5/1



**深圳秋田微电子有限公司**  
SHENZHEN AV/DISPLAY CO.,LTD.

PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC008002B05-GHY-R-01			ABC008002B05-GHY-R-01	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPR: 签字	
				CHK: 日期	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.