
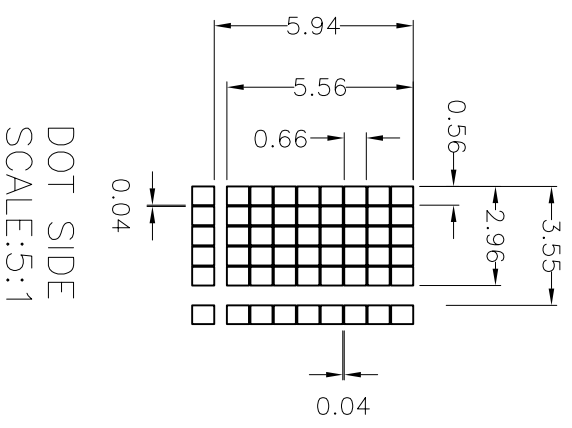
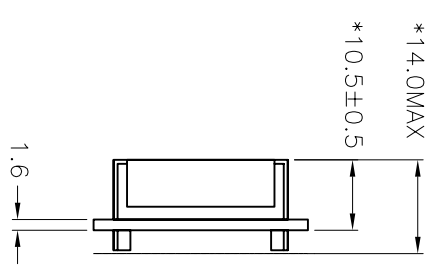


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	NOV-26-2007
B	Change PCB Hole Δ	MAR-05-2008

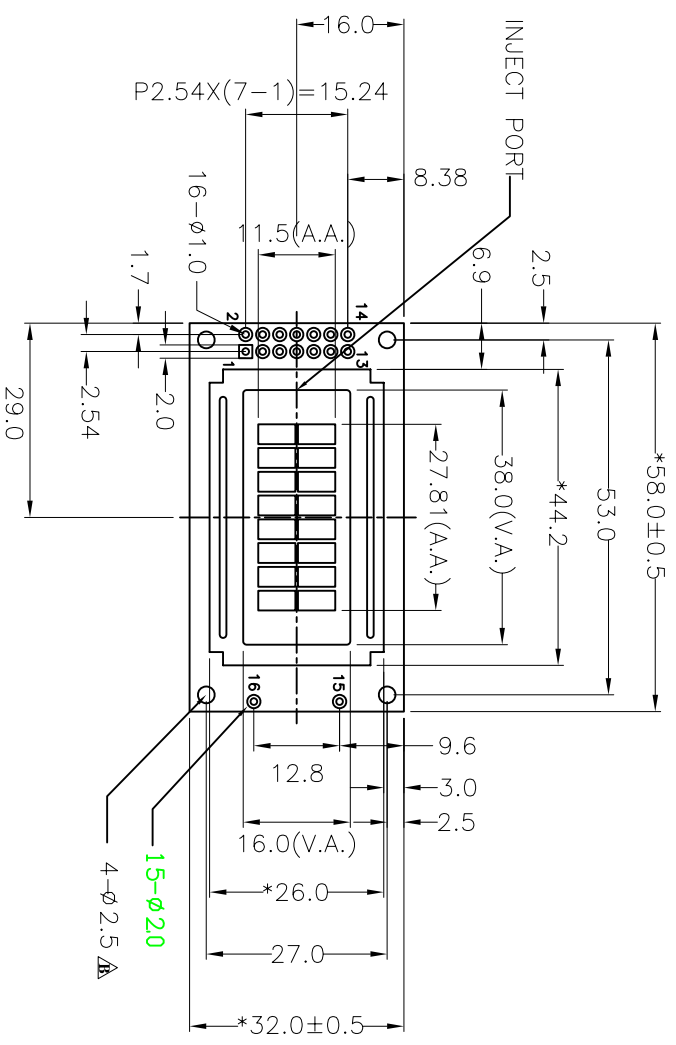

VIEWING DIRECTION \rightarrow

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDB

Specification:

- 1). Driving: Duty:1/16,Bias:1/5, VLCD:5.0V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:STN/Positive/Transflective/Yellow-Green
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: SPLC780D-001B-C
- 6). Backlight: Array, Yellow-Green
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant.

<p>深圳秋田微电子有限公司 SHENZHEN AVIDISPLAY CO.,LTD.</p>		SCALE: FTT 适应图面
		SHEET: 1 OF 1
PART NO: C/D结构图		MODEL NUMBER
ABC008002D10-YHY-R		ABC008002D10-YHY-R
PROJECTION 三角法		APPROVALS
APPROVALS		DATE
CHK:		DWN: