
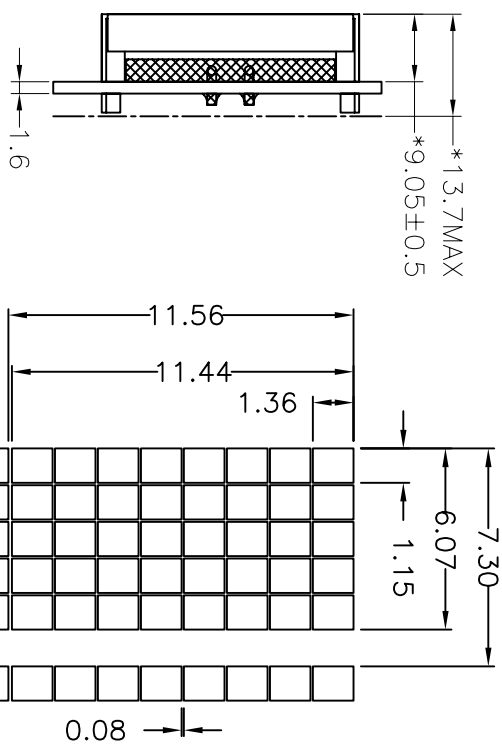


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	Oct-10-2007
B	Add backlight parameter and Change IC / B	May-19-2008
C	Add backlight parameter and dimension / C	Jun-19-2008

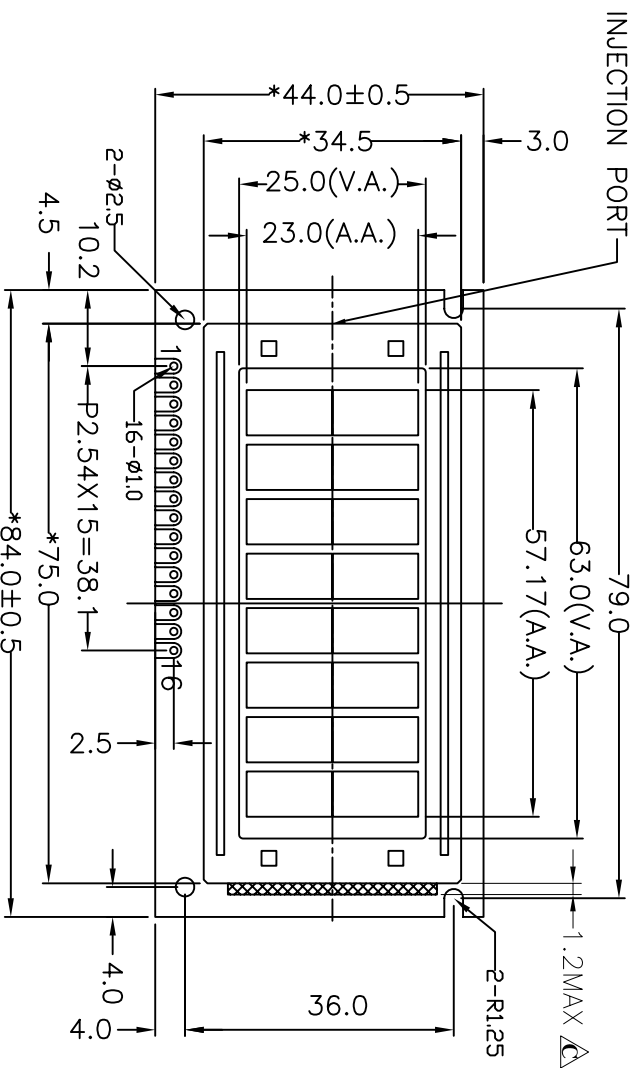


DOTS SIZE
SCALE 4:1

VIEWING DIRECTION

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:5.0V(Ref), VDD:5.0V
- 2). Viewing Direction:6 O'clock
- 3). Display mode:STN(Gray)/Positive/Transflective
- 4). Operating temp.:0°C~+50°C
Storage temp.: -10°C~+60°C
- 5). IC: SPLC780D1-001A-C(Or Compatible)
- 6). Backlight: Edge white
- 7). Dimensions with mark "*" are important, with mark "()" are referenced
- 8). All the raw materials are RoHS compliant.

PIN	1	2	3	4	5	6	7	8
CONNECTION	GND	VDD	VO	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LED(A)	LED(K)



LCM POWER SUPPLY



深圳秋田微电子有限公司
SHENZHEN AV/DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC008002E03-GBW-R			ABC008002E03-GBW-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPR: 签字	
				CHK: 签字	
				DWN: 日期	

DO NOT SCALE THIS DRAWING.	
----------------------------	--