
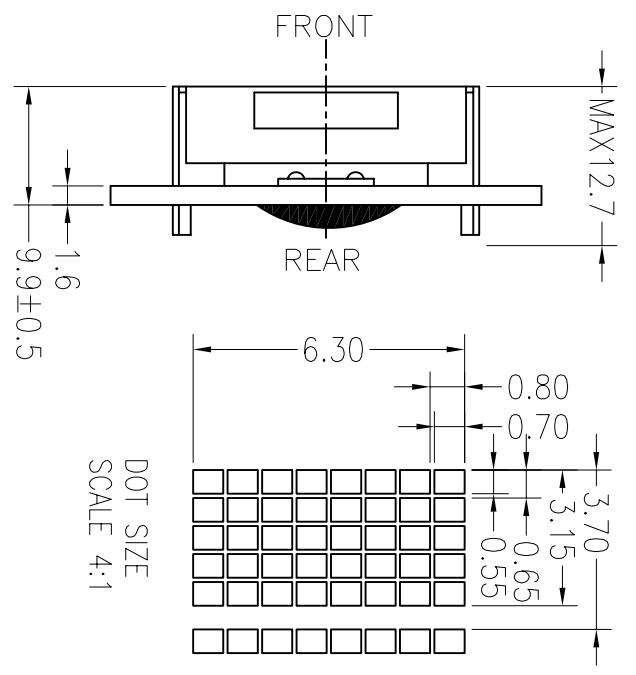


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	NOV-28-2005

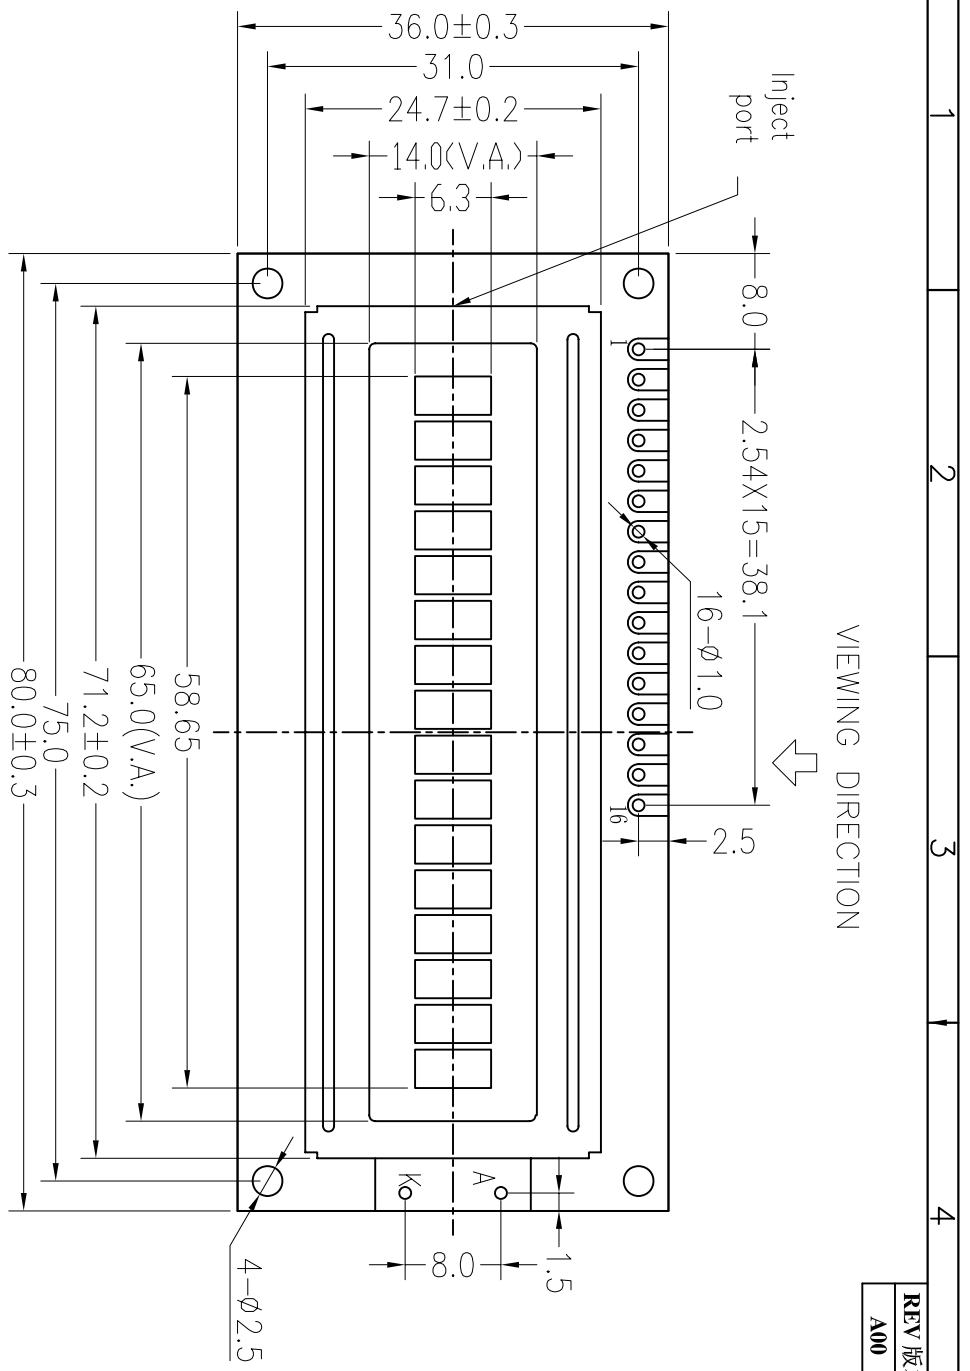

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
  - 2). Viewing Direction: 12 O'clock
  - 3). Display mode:STN/Positive/Transmissive/YG
  - 4). Operating temp.: -20°C~+70°C
  - 5). Storage temp.: -30°C~+80°C
  - 6). IC: SPLC780D-001B-C
  - 7). Backlight: Bottom Yellow-Green
- Dimensions with mark "\*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

		<b>深圳秋田视佳实业有限公司</b> <b>SHENZHEN AV-DISPLAY CO., LTD</b>	
PART NO: 零件编号	<b>BZF</b>	PROJECTION 三角法	MODEL NUMBER 模组型号
<b>FAV-ABC016001A13-00</b>			ABC016001A13-11X
		DO NOT SCALE THIS DRAWING.	
APPROVALS 签字	APP:	SCALE 比例	FTT 适应图面
GENERAL TOL: 公差	<b>±0.3</b>	SHEET: 页次	<b>1</b> OF <b>1</b>
DATE 日期		UNIT 单位	mm
CHK:		DWN:	