

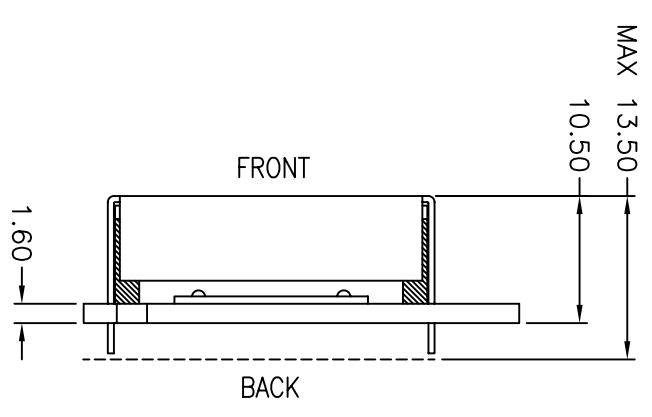


REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	JUL-12-2005

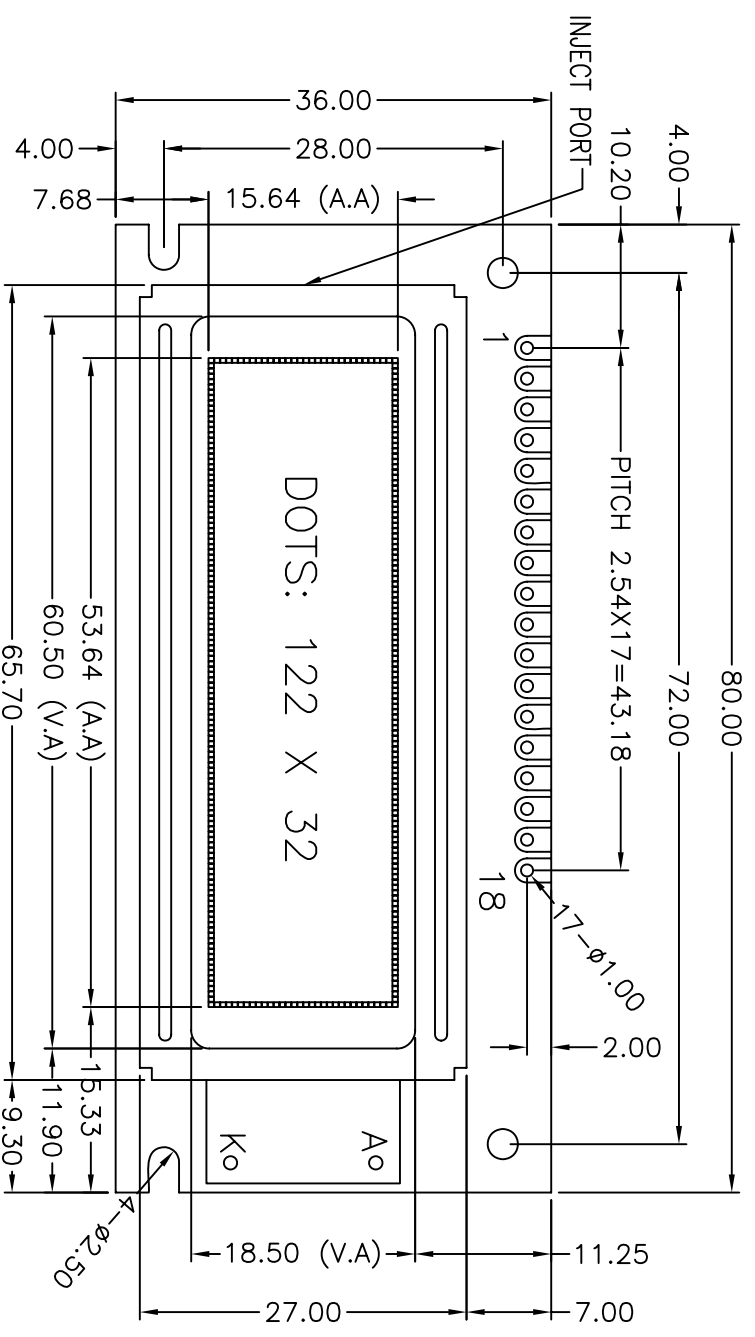

DOT SIZE
SCALE 10:1

Specification:

- 1). Driving: Duty:1/32, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode: STN/Positive/Transflective/Grey
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). IC: NJU6450A
- 6). Backlight: BOTTOM; Yellow-green
- 7). Dimensions with mark "*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9
CONNECTOR	VSS	VDD	V0	A0	E1	E2	R/W	DB0	DB1
PIN	10	11	12	13	14	15	16	17	18
CONNECTOR	DB2	DB3	DB4	DB5	DB6	DB7	RST	LEDA	LEDK

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-CBG122032E02-00			CRG122032E02-GHY
SCALE: FIT 适应图面		UNIT 单位	
SHEET: 1 OF 1		DATE	
GENERAL TOL: ±0.3		mm	
APP:	APPROVALS	签字	日期
CHK:			
DWN:			