
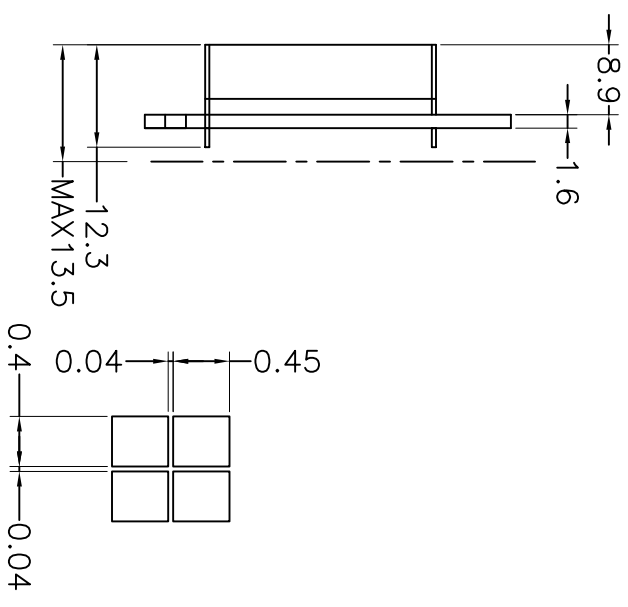


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	JUN-01-2005

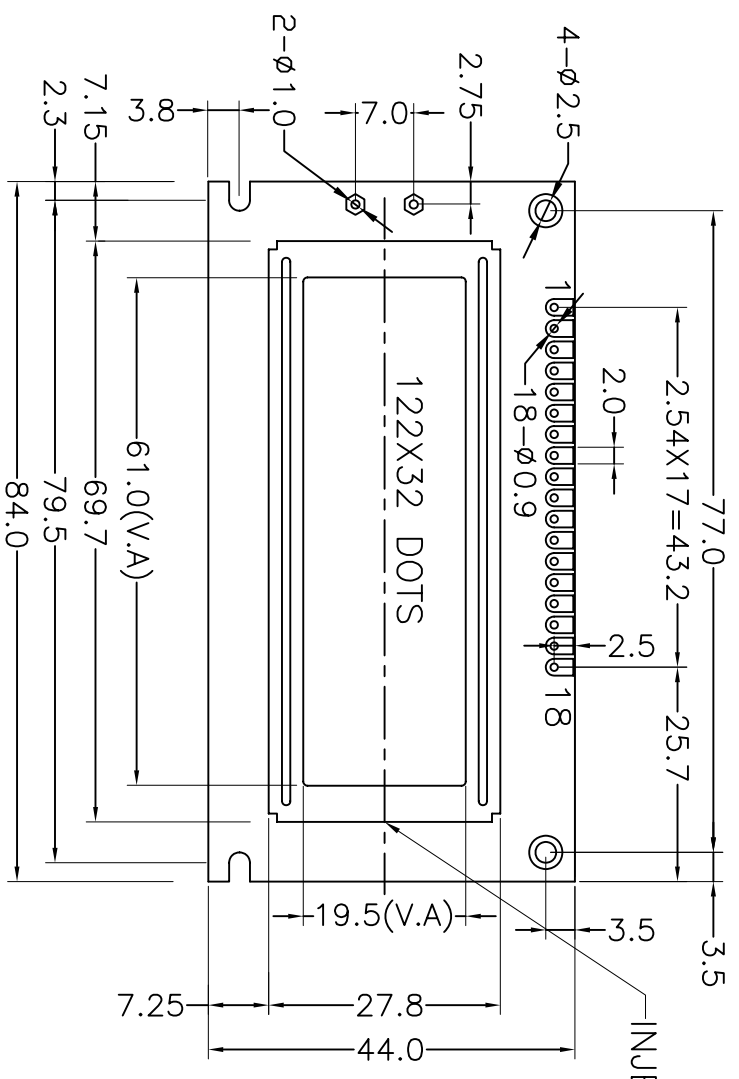


Specification:


- 1). Driving: Duty:1/32,Bias:1/5, VLCD:4.8V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:STN/Positive/Reflective/Y-G
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Drive IC:NJU6450
- 6). Dimensions with mark "*" are important,
with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9
CONNECTION	VSS	VDD	V0	A0	E1	E2	RW	D0	D1
PIN	10	11	12	13	14	15	16	17	18
CONNECTION	D2	D3	D4	D5	D6	D7	RES	NC	NC

DOTS SIZE
SCALE 15:1



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE: 比例	FTT 适应图面
ABG122032H00-YGN			ABG122032H00-YGN	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				APPROVALS 签字	UNIT 单位 mm
				CHK: 日期	DATE
				DWN: 日期	

DO NOT SCALE THIS DRAWING.