



REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	SEP-13-2007
B	Change pin define	SEP-20-2007
C	Update dimensions of bezel	NOV-14-2007

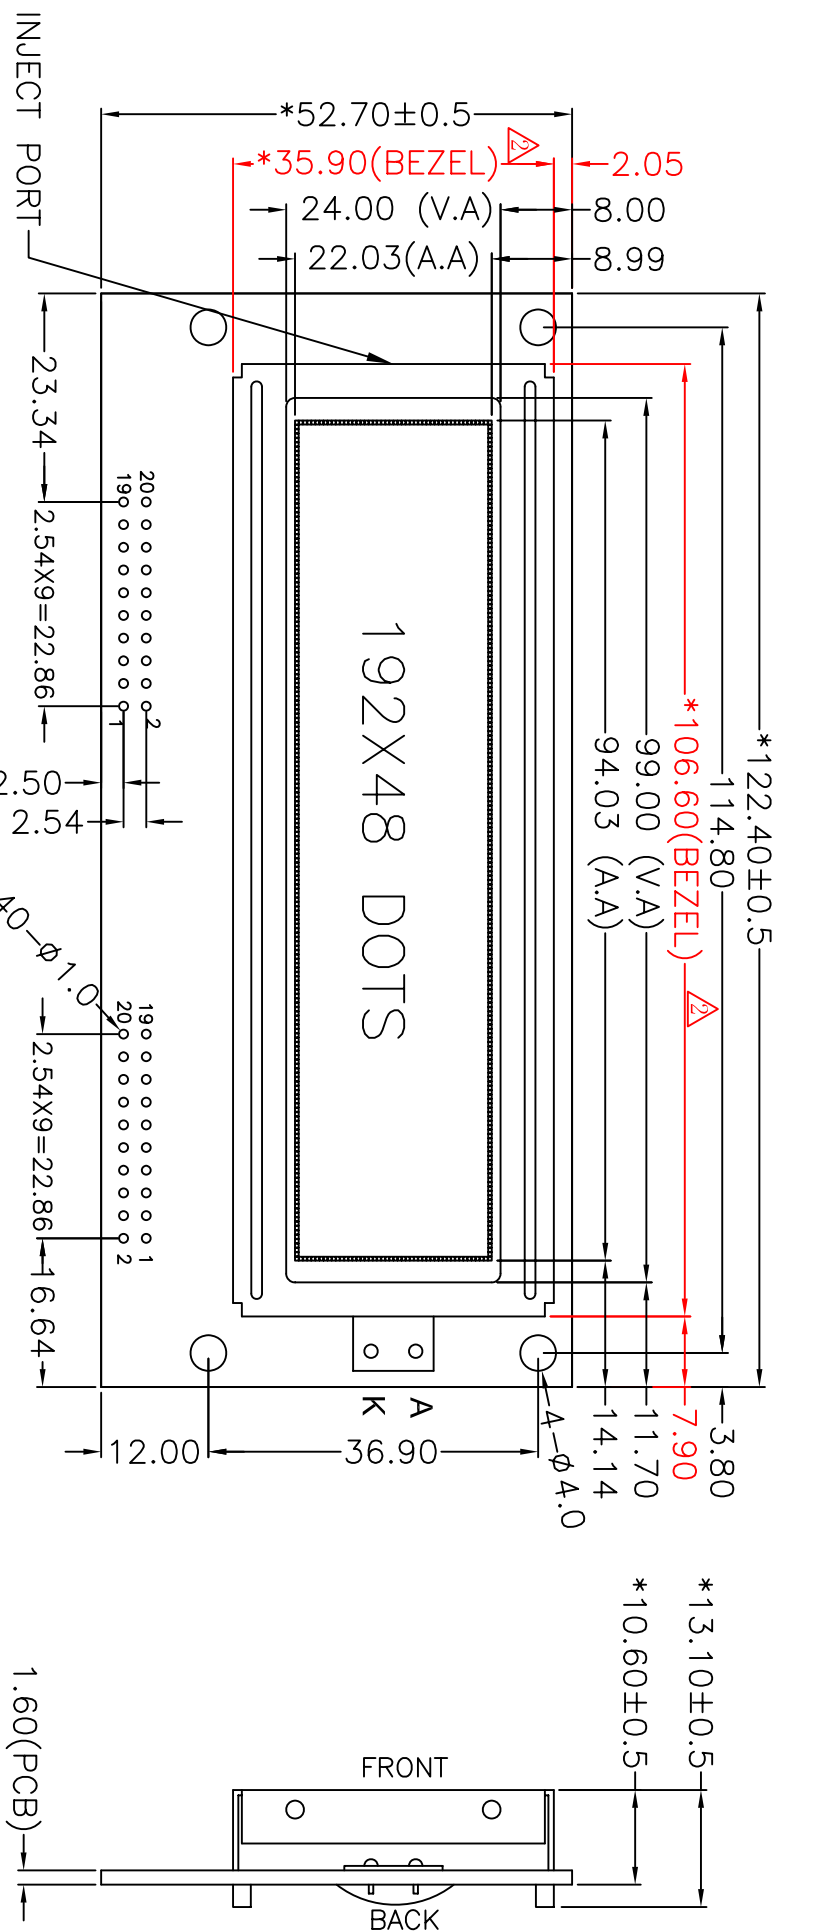

Specification:

- 1). Driving: Duty:1/48, Bias:1/8, Vdd:5.0V, Vlcd:9.0V
- 2). Viewing direction: 6 O'clock
- 3). Display mode: STN/Positive/Transflective/Y-G
- 4). Operating temp.:  $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$
- 5). Storage temp.:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 6). IC: SBN0064G
- 7). Backlight: ARRAY Y-G
- 8). Dimensions with mark "\*" are important, with mark "()" are referenced
- 9). All the raw materials are RoHS compliant



PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
CONNECTOR	VSS	VDD	VBE	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED1	LED2	R/W	E		

**深圳秋田电子有限公司**  
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	C/D	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABG192048A00-YBY-R			ABG192048A00-YBY-R	1	OR
				1	1

GENERAL TOL: ±0.3  
SHEET: 1 OF 1  
UNIT 单位: mm  
DATE 日期: \_\_\_\_\_

APP: \_\_\_\_\_  
CHK: \_\_\_\_\_  
DWN: \_\_\_\_\_