
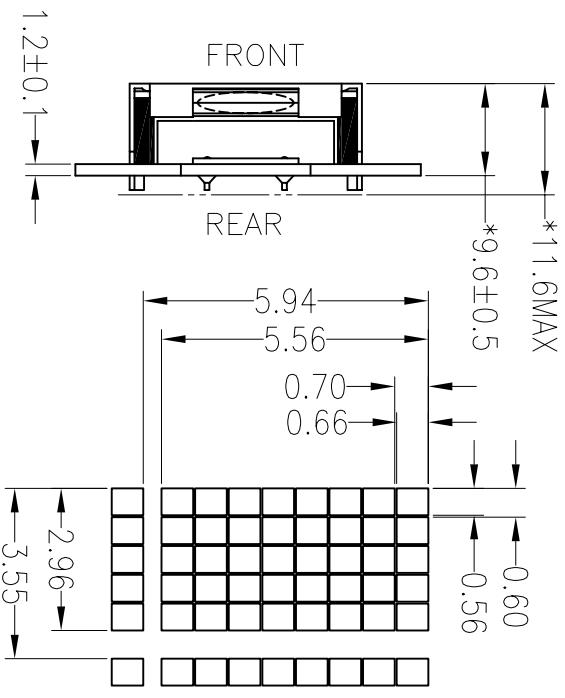
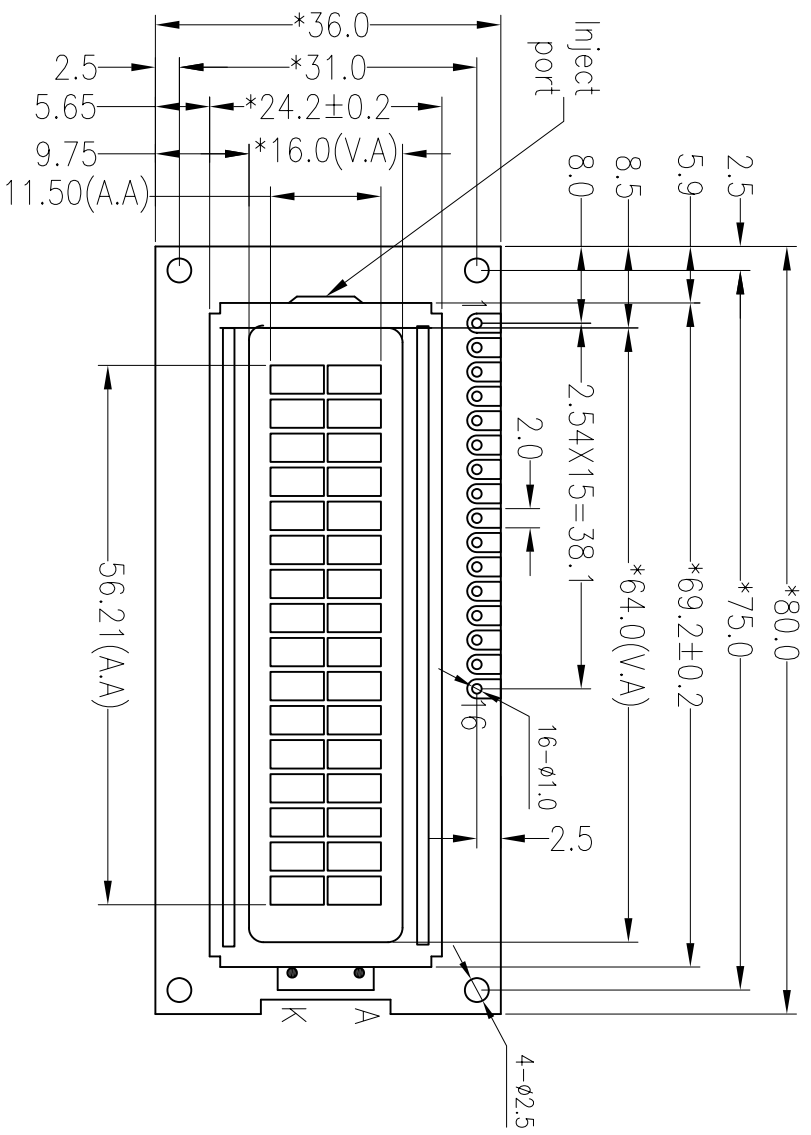


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	OCT-12-2006
B	Change the name	OCT-17-2006
C	Carry out RoHS	MAR-28-2007
D	Change Logo	DEC-07-2007


VIEWING DIRECTION





PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	RW	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- 2). Viewing Direction: 12 O'clock
- 3). Display mode:STN/Positive/Transmissive/YG
- 4). Operating temp.: -20°c~+70°c
- 5). Storage temp.: -30°c~+80°c
- 5). IC: S6A0069X01-COCX
- 6). Backlight: Bottom YG
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All the raw materials are RoHS compliant



深圳秋田微电子有限公司
SHENZHEN AV-DISPLAY CO.,LTD.

PART NO: 零件编号	CD结构	PROJECTION 三角法	MODEL NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC016002E30-Y1Y-R			ABC016002E30-Y1Y-R	SHEET: 页次	1 OF 1
				GENERAL TOL: 公差	±0.3
				UNIT 单位	mm
				APPROVALS 签字	DATE 日期
				CHK: 签字	
				DWN: 签字	

DO NOT SCALE THIS DRAWING.