



REV 版本	DESCRIPTION 描述	DATE 日期
A00	First issue	Jul-26-2005
A01	REV. Viewing Direction	Aug-08-2005

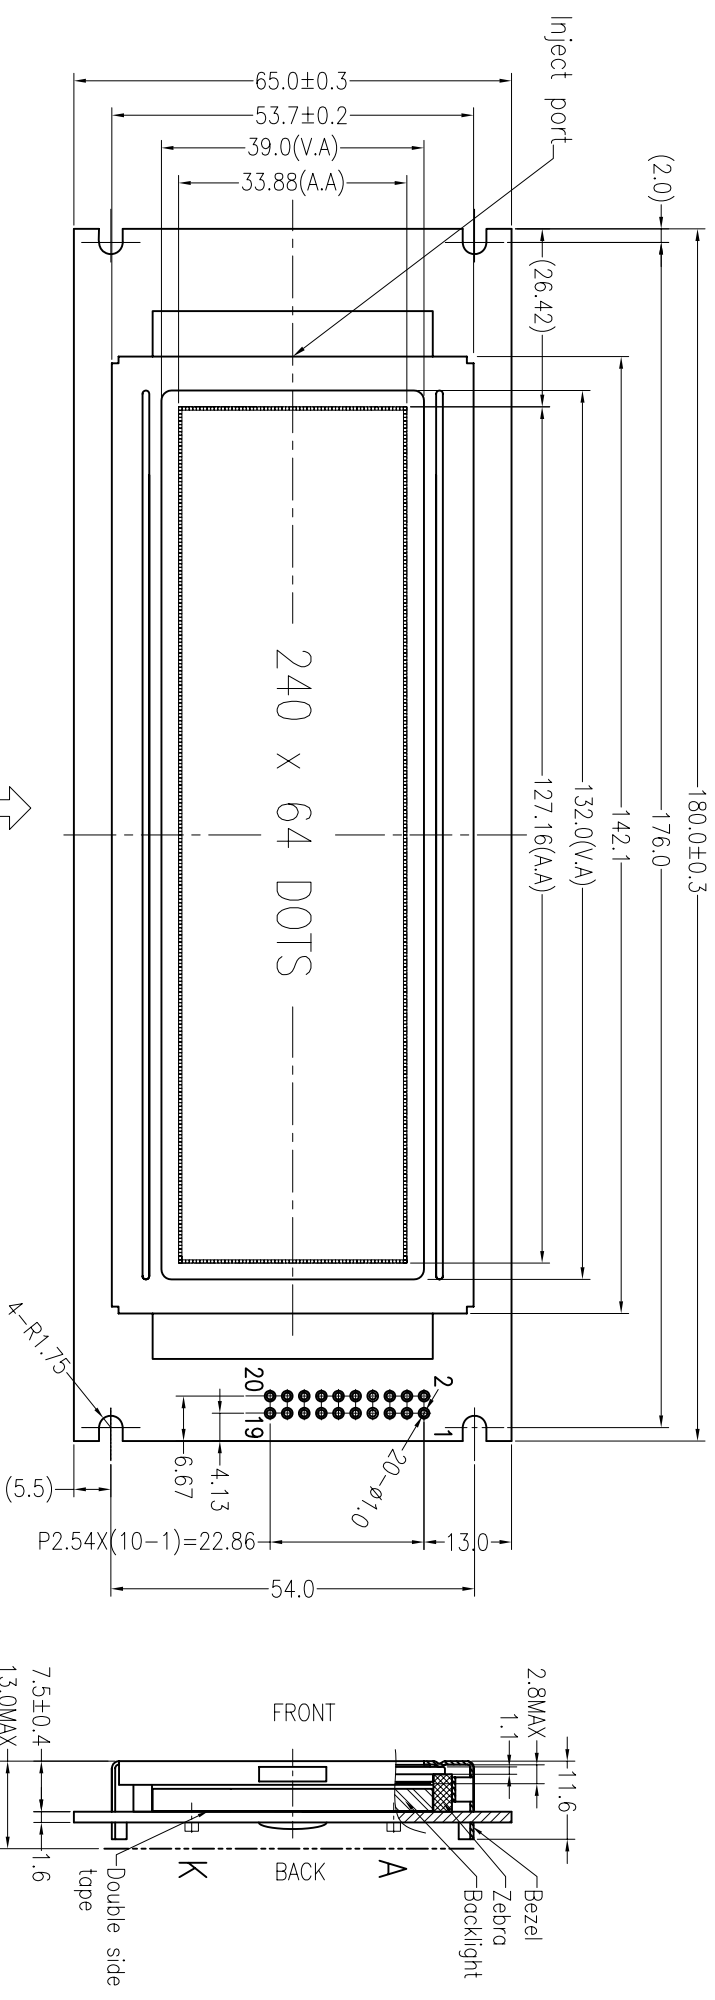

- Specification:
- 1). Driving: Duty:1/64,Bias:1/9 VLCD:12.0V, VDD:5.0V
 - 2). Viewing angle: 6 0'clock
 - 3). Display mode:STN/Positive/Transflective/grey
 - 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
 - 5). IC: T6963
 - 6). Backlight: Side White
 - 7). Dimensions with mark "*" are important, with mark "()" are referenced

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	VO	/WR	/RD	/CE	C/D	NC	/RESET
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC

DOTS SIZE
SCALE 20:1

		深圳秋田视佳实业有限公司 SHENZHEN AV-DISPLAY CO., LTD	
PART NO: 零件编号	C/D 结构图	PROJECTION 三角法	MODEL NUMBER 模组型号
FAV-CBG240064A03-01			CBG240064A03-GHW
		APPROVALS 签字	SCALE: FIT 适应图面
		DATE	UNIT 单位
		mm	mm
		DATE	DATE
		DATE	DATE