


| REV 版本 | DESCRIPTION 描述 | DATE 日期     |
|--------|----------------|-------------|
| A00    | First issue    | AUG-25-2007 |

VIEWING DIRECTION  



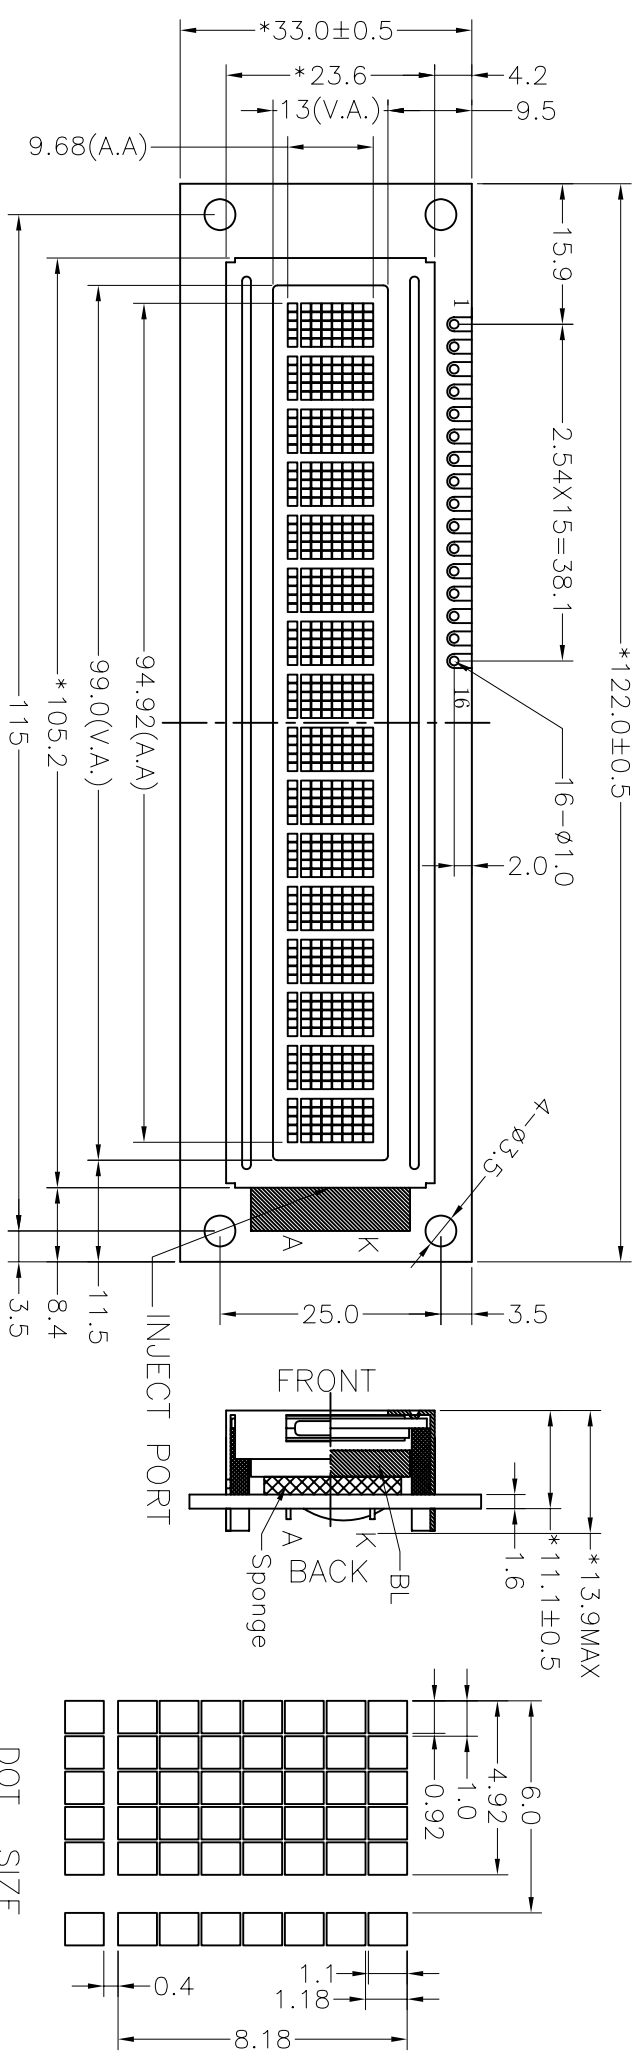

DOT SIZE  
 SCALE: 4:1



|           |     |     |     |     |     |     |      |      |
|-----------|-----|-----|-----|-----|-----|-----|------|------|
| PIN       | 1   | 2   | 3   | 4   | 5   | 6   | 7    | 8    |
| CONNECTOR | VSS | VDD | VEE | RS  | R/W | E   | DB0  | DB1  |
| PIN       | 9   | 10  | 11  | 12  | 13  | 14  | 15   | 16   |
| CONNECTOR | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | LEDA | LEDK |

Specification:

- 1). Driving: Duty:1/16, Bias:1/5, VLCD:3.3V, VDD:3.3V
- 2). Viewing direction: 12 O'clock
- 3). Display mode: FSTN/Positive/Transflective/Grey
- 4). Operating temp.:  $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- 5). Storage temp.:  $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 6). IC: SPLC780D-01
- 7). Backlight: Side, Red ,
- 8). Dimensions with mark "k" are important, with mark "()" are referenced
- 9). All the raw materials are RoHS compliant.



**深圳市秋田视佳实业有限公司**  
 SHENZHEN AV-DISPLAY CO.,LTD.

|                       |  |                    |                      |              |          |
|-----------------------|--|--------------------|----------------------|--------------|----------|
| PART NO:<br>零件编号      | CD 结构图   | PROJECTION<br>三角法  | MODEL NUMBER<br>模组型号 | SCALE<br>比例  | FIG 适应图面 |
| FAY-ABC016001B22-R-00 |  | ABC016001B22-FKR-R | APPROVALS<br>签字      | SHEET:<br>页次 | 1 OF 1   |
|                       |  |                    | UNIT 单位<br>mm        | DATE<br>日期   |          |
|                       |  |                    | APPR:<br>CHK:        | DWN:<br>DWN: |          |

GENERAL TOL:  $\pm 0.3$   
 DO NOT SCALE THIS DRAWING.